


## T396L336M035AT7301

Aliases (T396L336M035ATTR)

T396, Tantalum, MnO2 Tantalum, Commercial Grade, 33 uF, 20%, 35 VDC, Radial, Solid Tantalum, Three Leaded, Lead Spacing = 2.54mm

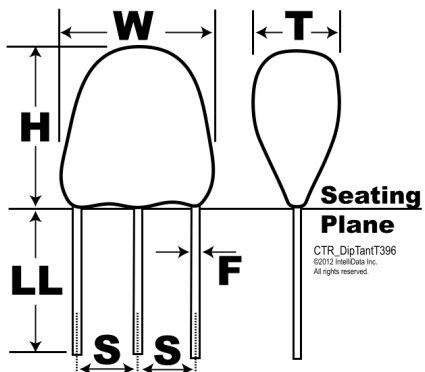

Click [here](#) for the 3D model.

### Dimensions

W	8.6mm
H	14.2mm
T	8.6mm
S	2.54mm +/-0.2mm
LL	4.75mm +/-1.27mm
F	0.5mm +/-0.05mm

### Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	500

### General Information

Series	T396
Dielectric	MnO2 Tantalum
Style	Radial Three Lead
Description	Radial, Solid Tantalum, Three Leaded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Conformal
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	33 uF
Capacitance Tolerance	20%
Voltage DC	35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	9.2 uA