

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0716612130](#)  
**Status:** **Active**  
**Overview:** [EBBI 50D Connector System](#)  
**Description:** 1.27mm Pitch EBBI 50D Plug, Right-Angle, 130 Circuits, 2.79mm PC Tail Length

**Documents:**

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Drawing \(PDF\)](#)

**Agency Certification**


CSA LR19980  
 UL E29179

**General**

Product Family PCB Headers  
 Series [71661](#)  
 Application Board-to-Board, Signal, Wire-to-Board  
 Overview [EBBI 50D Connector System](#)  
 Product Name EBBI  
 UPC 800755008869

**Physical**

Breakaway No  
 Circuits (Loaded) 130  
 Circuits (maximum) 130  
 Color - Resin Black  
 Durability (mating cycles max) 2000  
 First Mate / Last Break No  
 Flammability 94V-0  
 Glow-Wire Capable No  
 Guide to Mating Part No  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Metal Brass  
 Material - Plating Mating Gold  
 Material - Plating Termination Tin  
 Material - Resin High Temperature Thermoplastic  
 Net Weight 9.983/g  
 Number of Rows 4  
 Orientation Right Angle  
 PC Tail Length 2.79mm  
 PCB Locator Yes  
 PCB Retention Yes  
 PCB Thickness - Recommended 1.60mm  
 Packaging Type Tray  
 Pitch - Mating Interface 1.27mm  
 Pitch - Termination Interface 1.27mm  
 Plating min - Mating 0.762µm  
 Plating min - Termination 1.270µm  
 Polarized to Mating Part Yes  
 Polarized to PCB Yes  
 Shrouded Fully  
 Stackable No  
 Surface Mount Compatible (SMC) No  
 Temperature Range - Operating -40° to +105°C  
 Termination Interface: Style Through Hole

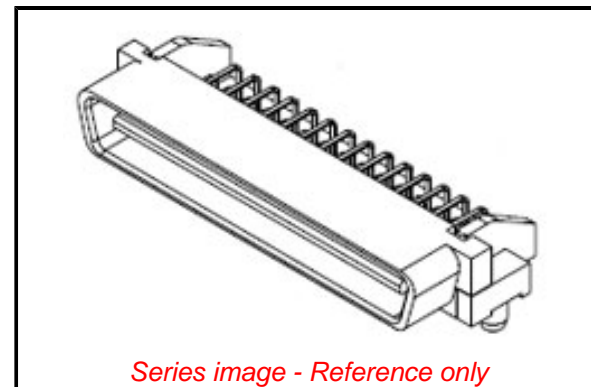

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
 -ED/88/2018 (15  
 January 2019)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[71661](#) Series

**Mates With**

EBBI 50D Receptacle [71660](#) , [87552](#)

**Electrical**

Current - Maximum per Contact  
Voltage - Maximum

1.0A  
30V

**Solder Process Data**

Lead-free Process Capability  
Process Temperature max. C

SMC&WAVE  
235

**Material Info****Reference - Drawing Numbers**

Sales Drawing

SDA-71661-2XXX

This document was generated on 02/27/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**