


F611DY684K1K0ZLH0J

F611, Film, Metallized Polyester, General Purpose, 0.68 uF, 10%, 1000 VDC, 85°C, Lead Spacing = 22.5mm

FRONT VIEW

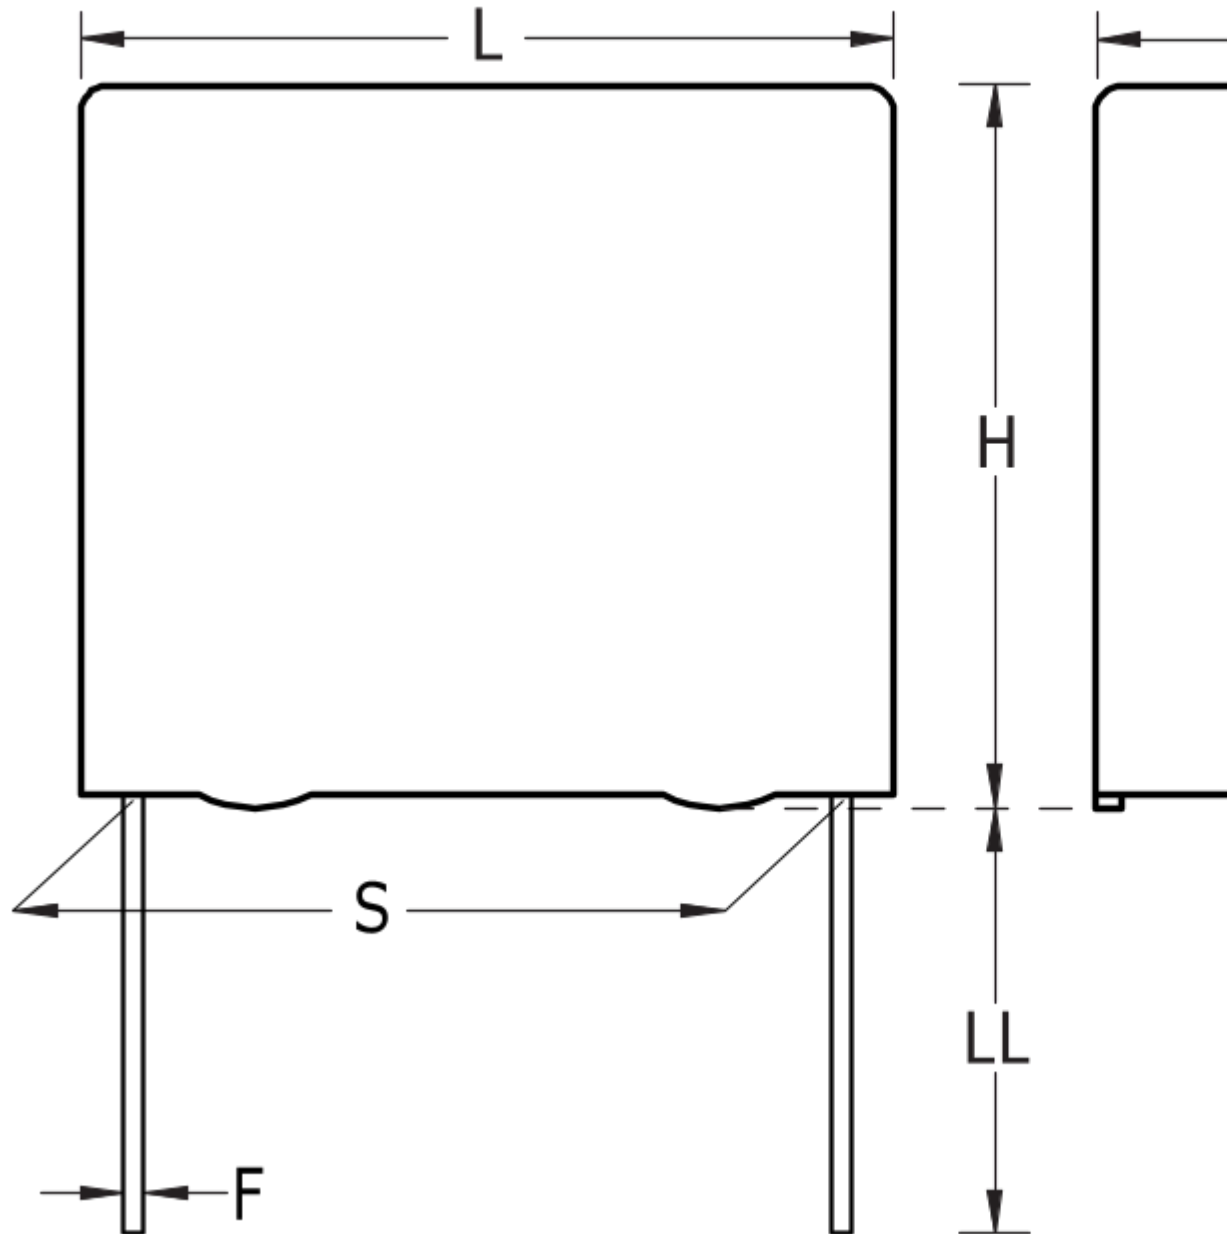

Click [here](#) for the 3D model.

Dimensions

- L 26mm -0.5mm
- H 24.5mm -0.5mm
- T 15.5mm -0.5mm
- S 22.5mm +/-0.4mm

Dimensions

LL 17mm -1mm
F 0.8mm +/-0.05mm
G 0.5mm NOM

Packaging Specifications

Packaging Pizza, Box
Packaging Quantity 252

General Information

Series F611
Dielectric Metallized Polyester
Style Radial
Features MKT (Wound), DC Multipurpose Applications
RoHS Yes
Lead Wire Leads
AEC-Q200 No
Component Weight 14.52 g
Miscellaneous The Rated Voltage Decreases 1.25%/C Between +85C And +105C (For +125C, Please Consult KEMET). ClimCat: 55/105/56.

Specifications

Capacitance 0.68 uF
Capacitance Tolerance 10%
Voltage AC 250 VAC
Voltage DC 1000 VDC, 750 VDC (105C)
Temperature Range -55/+105°C
Rated Temperature 85°C
Dissipation Factor 0.8% 1kHz, 1.5% 10kHz
Insulation Resistance 14.706 GOhms
Max dV/dt 15 V/us
Inductance 6 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 8f625a12-64f6-457d-a496-a8b532bbb717
© 2006 - 2023 KEMET
Generated 5/18/2023 - 8f625a12-64f6-457d-a496-a8b532bbb717
© 2006 - 2023 KEMET