

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012045	4CKT RECEPTACLE HOUSING 555704R210	1	PC
B	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

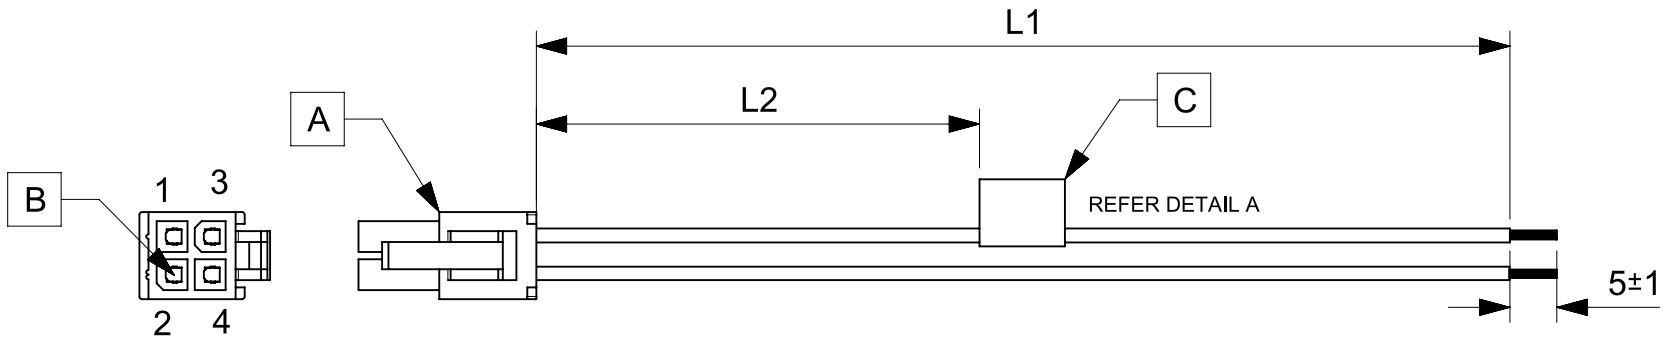


TABLE			
PART NUMBER	L1	L2	TITLE
2153262041	150±8	63 REF	MINIFIT JR DR R-S 4 CIRCUIT 150MM Au
2153262042	300±10	138 REF	MINIFIT JR DR R-S 4 CIRCUIT 300MM Au
2153262043	600±10	288 REF	MINIFIT JR DR R-S 4 CIRCUIT 600MM Au

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/09	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $F_A = 0$ $F_E = 0$ $F_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS: mm SCALE: NTS		CURRENT REV DESC: EC NO: 638379 DRWN: ARAJU 2020/03/09 CHK'D: RDESAI01 2020/05/28 APPR: RDESAI01 2020/05/28 INITIAL REVISION: DRWN: ARAJU 2020/03/09 APPR: RDESAI01 2020/05/28	molex					
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °		SEE TABLE								
	4 PLACES ±	3 PLACES ±	2 PLACES ±	1 PLACE ±		0 PLACES ±	PRODUCT CUSTOMER DRAWING				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION		DRAWING: A4-SIZE	SERIES: 215326	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET