MATERIALS AND FINISHES

BODY ZINC ALLOY
PLATED NICKEL

CENTER CONTACT PHOSPHOR BRONZE
PLATED GOLD

INSULATOR POLYPROPYLENE (94-V0)

MOUNTING POST PHOSPHOR BRONZE
PLATED TIN

SOLDER TAIL COPPER OVER STEEL
PLATED TIN

JAM NUT BRASS
PLATED NICKEL

LOCK WASHER PHOSPHOR BRONZE
PLATED NICKEL

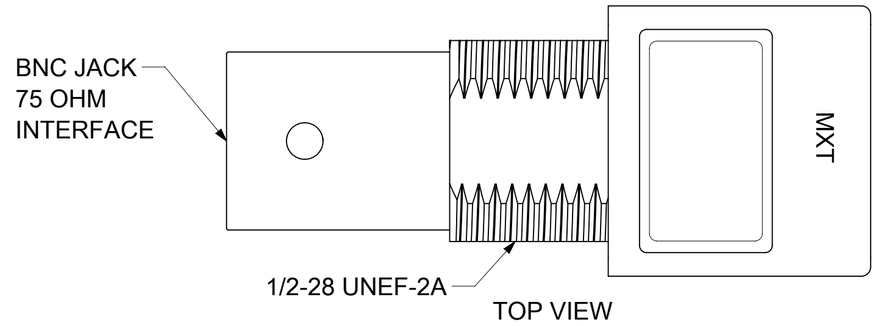



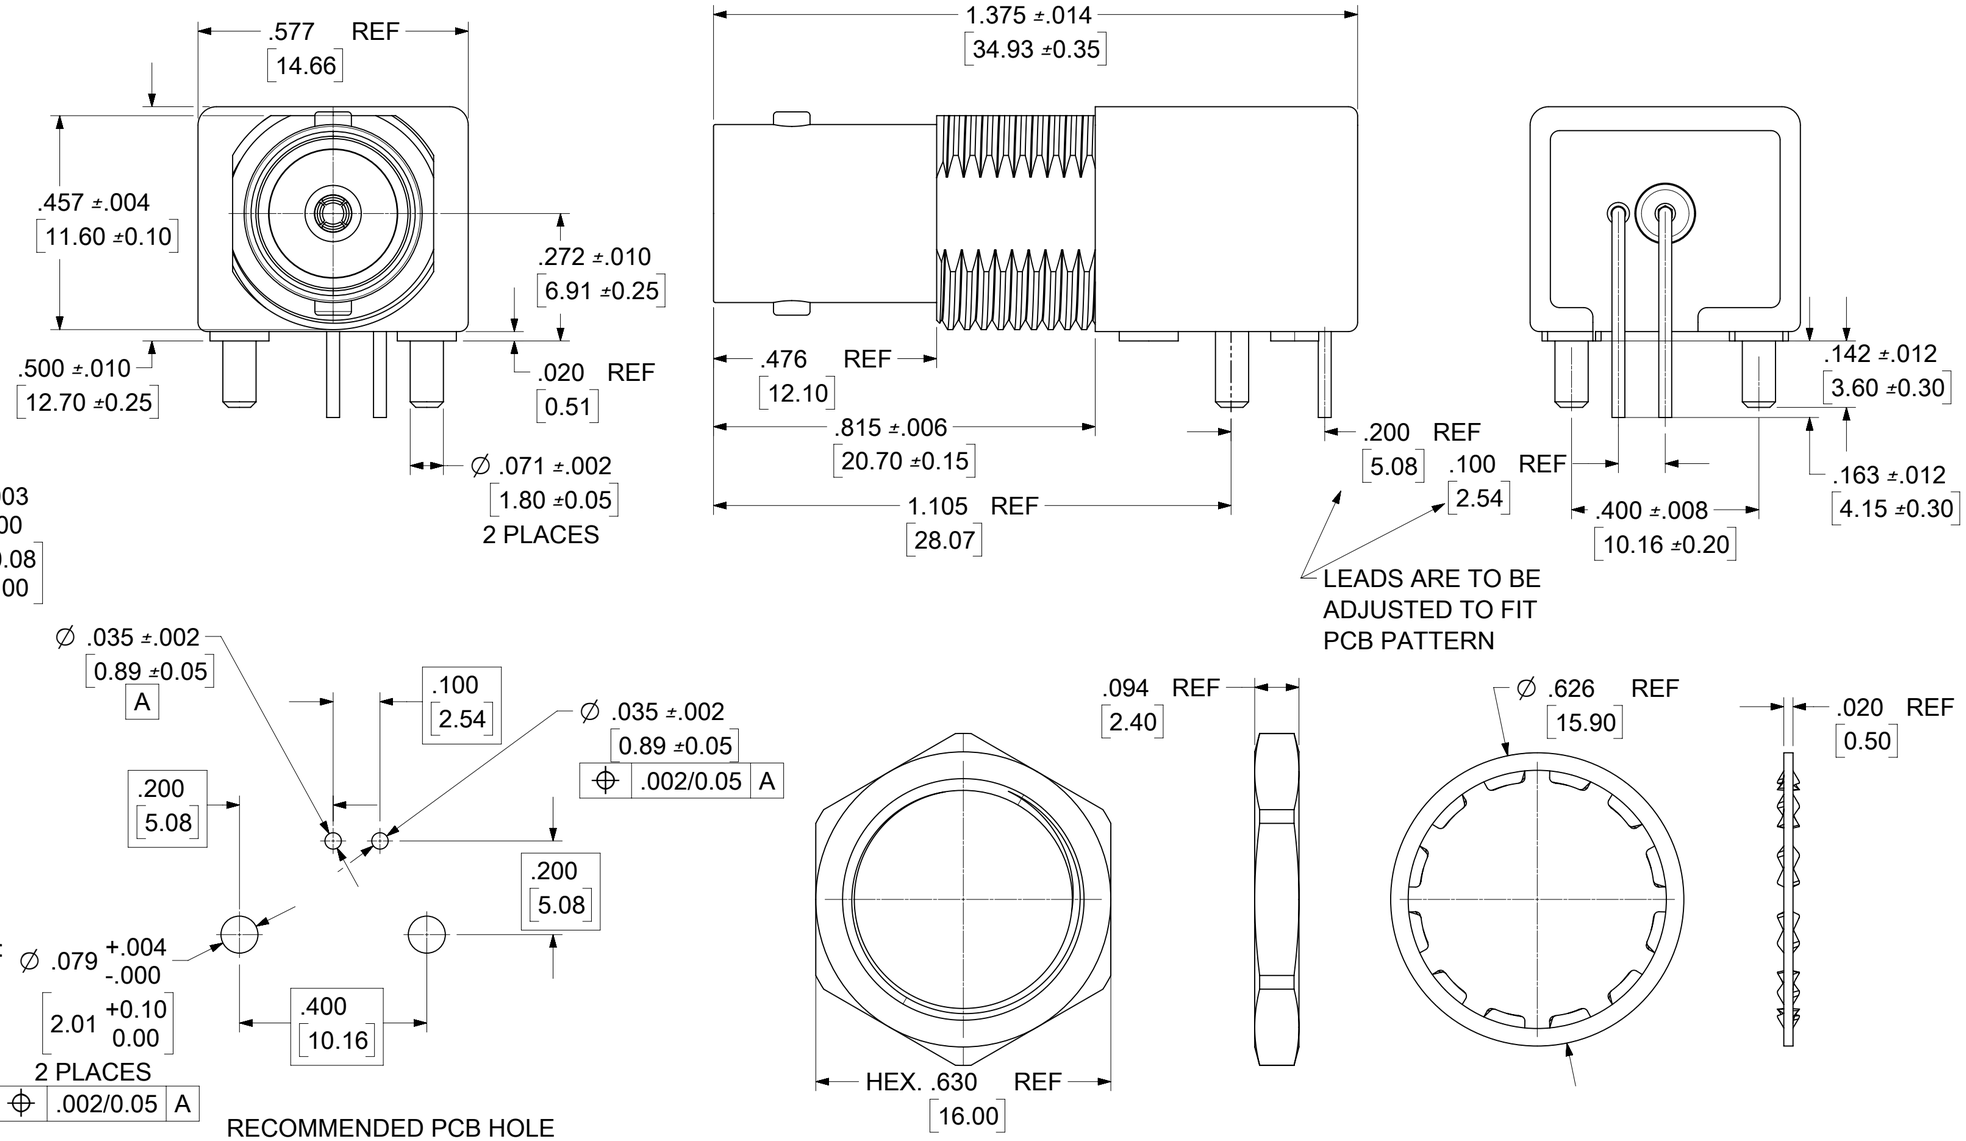

RECOMMENDED MOUNTING HOLE
PANEL THICKNESS: .216 (5.50) MAX
RECOMMENED MOUNTING TORQUE:
1.36 N-m (12 INCH LBS) MAX

RECOMMENDED PCB HOLE
CONFIGURATION

73171-4340	QTY (1) OF 73101-0400 IN SINGLE BAG WITH LABEL
73101-0401	WITH JAM NUT AND WASHER; PACKAGING BY TRAY
73101-0400	WITHOUT JAM NUT AND WASHER; PACKAGING BY TRAY
PART NO.	DESCRIPTION

PS-89675-1030	PRODUCT SPECIFICATION
SPECIFICATION	DESCRIPTION

REV.	DATE	DESCRIPTION
A6	2018/03/26	ADD POST DIM .071±.002 PER EWR 11902

DOCUMENT STATUS	P1	RELEASE DATE	2018/04/03 07:32:25

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS: HYBRID
SCALE
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± °
4 PLACES ±
3 PLACES ±
2 PLACES ±
1 PLACE ±
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:
EC NO: 174408
DRWN: CWEI02 2018/03/26
CHK'D:
APPR:
INITIAL REVISION:
DRWN: MCHAN05 2007/06/12
APPR: MHUANG 2007/06/12

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 73101

molex

BNC JACK,R/A PCB,75 OHMS
DIE CAST, RECEPTACLE BNC-J/RA/PCB

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
SD-73101-040	PSD	001	A6

MATERIAL NUMBER | CUSTOMER: GENERAL MARKET | SHEET NUMBER: 1 OF 1

FORMAT: master-tb-prod-C
REVISION: H
DATE: 2018/01/18