



(1)

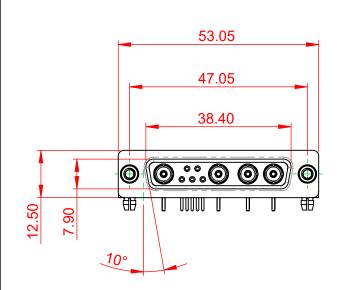



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

.XX ±0.13


.XXX ±0.05



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/2019		
		CHECKED:	DATE:		
EDAG INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 630-9W4-240-5T5		ISSUE	
		PART NUMBER: 630-9W4-	·240-5T5	1	

5000MΩ min.

1000V AC rms

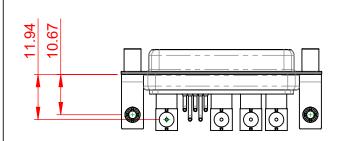



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

	\bigtriangleup		
		\sim	
	N		۶'n
000			$\langle \rangle$
		X	
	- North Contraction of the second sec		
		~uQ	1/1

