

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	436400800	MicroFit 3.0 Inline Plug Panel Mnt 8 CKT	2	PC
C	430310023	MICROFIT 3.0 M CRP TERM CHN 30AU 18AWG	16	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B8	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	B7	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	B6	1X18AWG DISC SR-PVC BK UL10002	BLACK
A4	B5	1X18AWG DISC SR-PVC BK UL10002	BLACK
A5	B4	1X18AWG DISC SR-PVC BK UL10002	BLACK
A6	B3	1X18AWG DISC SR-PVC BK UL10002	BLACK
A7	B2	1X18AWG DISC SR-PVC BK UL10002	BLACK
A8	B1	1X18AWG DISC SR-PVC BK UL10002	BLACK

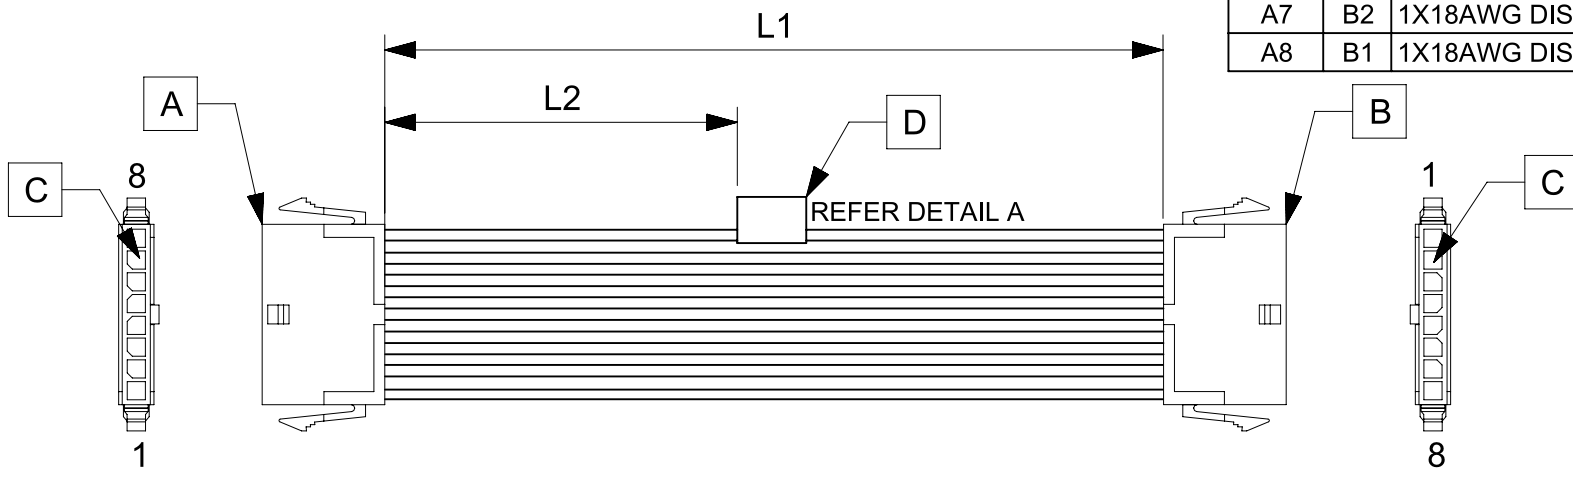


TABLE			
PART NUMBER	L1	L2	TITLE
2147522081	150±8	63 REF	MICROFIT 3.0 SR P-P 8CKT 150 MM Au
2147522082	300±10	138 REF	MICROFIT 3.0 SR P-P 8CKT 300 MM Au
2147522083	600±10	288 REF	MICROFIT 3.0 SR P-P 8CKT 600 MM Au

- NOTES**
1. Cable assembly must pass 100% continuity and polarity test.
 2. Connector view shown is from mating side.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)				
	mm	NTS	ANGULAR TOL ± °				
	4 PLACES ±		EC NO: 637489				
3 PLACES ±		DRWN: ARAJU 2020/03/02		PRODUCT CUSTOMER DRAWING			
2 PLACES ±		CHK'D: RDESAI01 2020/05/14					
1 PLACE ±		APPR: RDESAI01 2020/05/14					
0 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
			A4-SIZE	214752	2147522081	GENERAL MARKET	1 OF 1