


TOLERANCE UNLESS OTHERWISE SPECIFIED		
.X	±0.25	
.XX	±0.13	
.XXX	±0.05	

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL





MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: 10mΩ MAX. INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm

40 IS STANDARD AS SHOWN ON SHEETS 3 & 4

CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 630 C	OMBO ASSEMBLY
	DRAWN: C.B	DATE: JAN. 01/2019
	CHECKED:	DATE:
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 4
	DDAMING NUMBER: 620 42\M2	2250 4TA

DRAWING NUMBER: 630-43W2250-4TA ISSUE PART NUMBER: 630-43W2250-4TA



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) **ORIGINAL**

00 2W2

(COO) o

o(:o:

2WK2

5W1

000)0 3W3

0000)0 lοſ 3WK3

0...0 7W2

(...0...)

11W1

000000 5W5

0000 9W4

000::::0

13W3

0......0

o(::::::0:::::: 21W1

17W2



000:::::000

17W5



00********* 25W3



0000000

21W4









43W2

47W1

COMBINATION D-SUB

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.:	630 COMBO ASSEMBLY
	DRAWN: C.B	DATE: JAN. 01/2019
	CHECKED:	DATE:
;	SCALE: N.T.S	SHEET 2 OF 6
)	DRAWING NUMBER: 630-	43W2250-4TA ISSUE

03U-43VVZZ3U-4 I A PART NUMBER: 630-43W2250-4TA

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13

.XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

2W2 / 2WK2


3W3 / 3WK3

5W1 Male/Female

24W7 Male/Female











5W5 Male





7W2 Male/Female





11W1 Male/Female


27W2 Male/Female

21W4 Male/Female





8W8 Female






PCB EDGE




17W2 Male/Female

21W1 Male/Female

PART NUMBER:





CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2

COMBINATION D-SUB




EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


SW REFERENCE NO.:	630 COMBO ASSEMBLY	
DRAWN: C.B	DATE: JAN. 01/2019	
CHECKED:	DATE:	
SCALE: N.T.S	SHEET 3 OF 4	
DRAWING NUMBER: 630	0-43W2250-4TA ISS	UF

630-43W2250-4TA

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

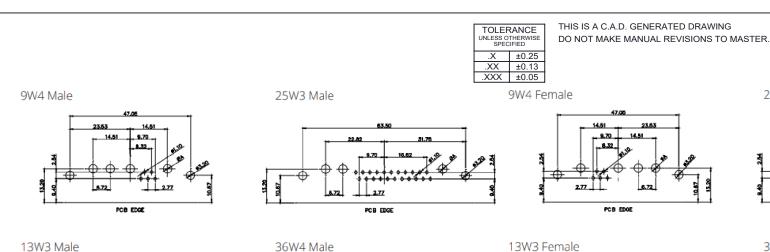

PCB EDGE



25W3 Female

ISSUE NUMBER

ORIGINAL

