


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5961001821	~

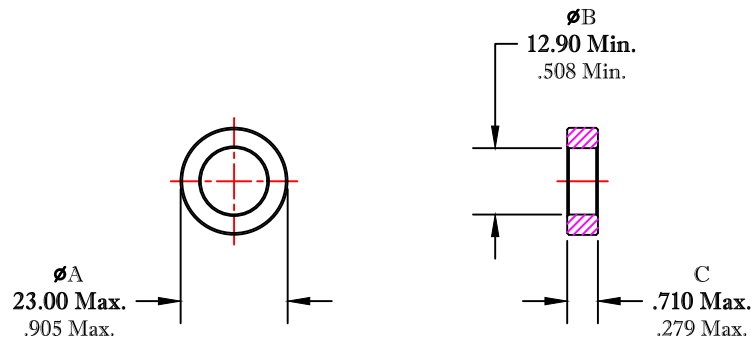

AFTER COATING

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS

$\Sigma l/A(\text{mm}^{-1})$	l_e (mm)	A_e (mm ²)	V_e (mm ²)	L_o (nH)	A_L (nH) @10 kHz <10gauss	$\tan \delta/\mu_i$ @1 MHz <1gauss	$\tan \delta/\mu_i$ @10 MHz <1gauss
2.0692	54.2	26.2	1416	0.607	75±25%	≤75X10E-6	≤250X10E-6

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 5961001801.
- 2 - COATING THICKNESS = **0.25mm** [.010"] MAX.
- 3 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.

FR# 61

FAIR-RITE PRODUCTS CORP.				
TITLE				
COATED TOROID				
DRAWN BY J.SERENCIS	DATE 07-17-2018	SIZE	PART NO.	REV.
CHKD BY		B	5961001821	~
APPRVD BY		SCALE	NONE	SHEET 1 of 1