


PCB terminal block - ZFKKDSA 1,5C-5,0- 6 GY - 1708504

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 16 A, pitch: 5 mm, number of positions: 6, connection method: Spring-cage connection, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: gray

The figure shows a 15-position version

Your advantages

- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- ✓ Conductor connection on several levels enables higher contact density
- ✓ The latching on the side enables various numbers of positions to be combined

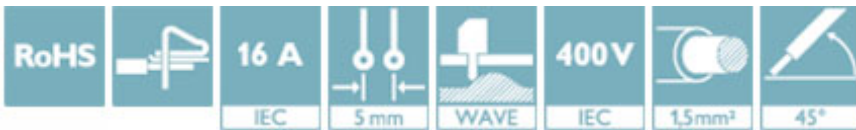

Key Commercial Data

Packing unit	50 pc
GTIN	
GTIN	4055626123455

Technical data

Dimensions

Pitch	5 mm
Solder pin [P]	3.7 mm
Hole diameter	1.1 mm

General

Range of articles	ZFKKDS(A) 1,5C
Insulating material group	I
Nominal cross section	1.5 mm ²
Flammability rating according to UL 94	V0
Number of positions	6

Standards and Regulations

PCB terminal block - ZFKKDSA 1,5C-5,0- 6 GY - 1708504

Technical data

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>