


T340C226M016AS7301

Aliases (T340C226M016ASTR)

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 22 uF, 20%, 16 VDC, Lead Spacing = 5mm

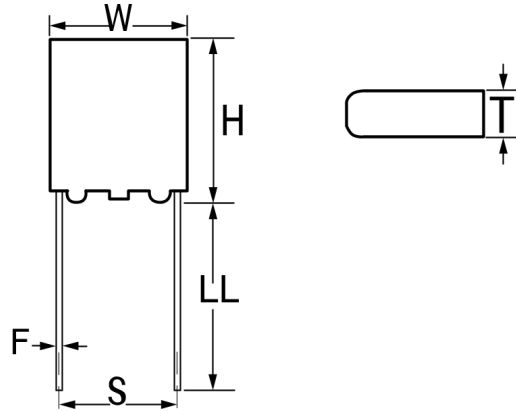

Click [here](#) for the 3D model.

Dimensions	
W	7.3mm MAX
H	10.5mm MAX
T	4.3mm MAX
S	5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	1000

General Information	
Series	T340
Dielectric	MnO ₂ Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	No
Prop 65	⚠ WARNING: Cancer and reproductive harm - http://www.p65warnings.ca.gov .
SCIP Number	a3b4e2e1-63ea-439e-a89a-743225502a7d
Termination	Lead (SnPb)
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	22 uF
Capacitance Tolerance	20%
Voltage DC	16 VDC (85C), 10 VDC (125C), 0.16 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	4 uA