



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

INMARSAT Ceramic Bandpass Filter

Part Number: AM1542B964



Electrical specifications

- Center Frequency:** 1542 MHz
- Bandwidth:** 34 MHz
- Input / Output Impedance:** 50 Ohms
- Passband:** 1525–1559 MHz
- Passband Insertion Loss:** 1525–1559 MHz 2.5 dB
- Passband Ripple:** 1525 – 1559 MHz 1.0 dB
- Passband Return Loss:** 1525 – 1559 MHz 9.5 dB
- Rejection:** 1475 MHz 14.0 dB
- Rejection 2:** 1626 MHz 24.0 dB
- Rejection 3:** 1650–1661 MHz 32.0 dB
- Power Handling:** 1 Watt max

Mechanical

- Mounting Method:** SMT
- Dimensions:** 11.9 x 8.9 x 4.496 mm

Environmental


- Operating Temperature:** -40°C to +70°C
- Storage Temperature:** -50°C to +90°C

This product is RoHs compliant.



Mechanical Drawing:

Mechanical Drawing

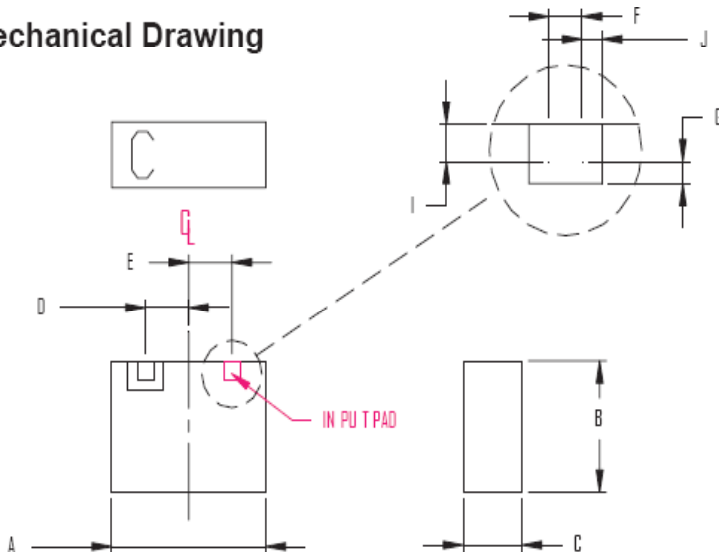

Dim	Nominal (mm)	Tolerance (mm) +/- or max
A	11.9	Max
B	8.9	Max
C	4.496	Max
D	3.302	0.127
E	3.302	0.127
F	1.27	0.127
G	0.762	0.127
I	1.27	0.127
J	0.762	0.127




ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

INMARSAT Ceramic Bandpass Filter

Part Number: **AM1542B964**



Response Plot:

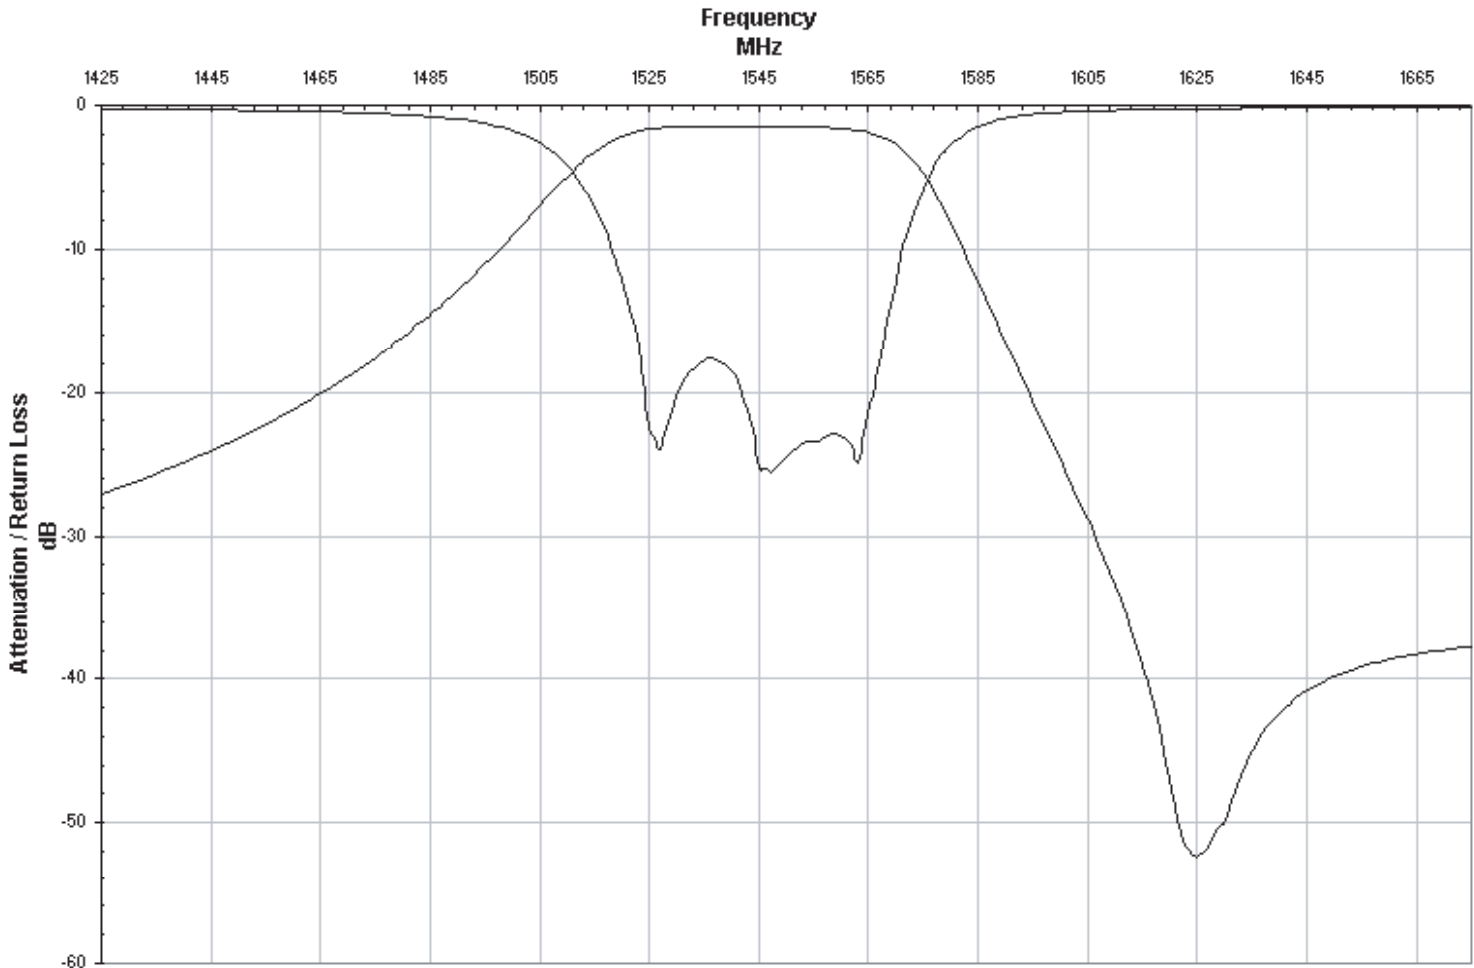

Typical Response Curve