


## Specification Sheet

Part Number: 157-00068

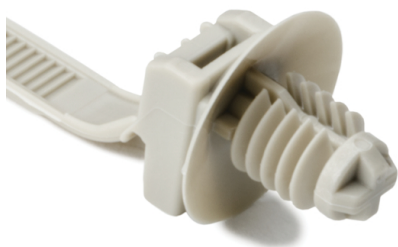

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

Initial fir tree serves as a locating feature for assistance in blind assembly applications.

Disc feature provides anti-rattle protection in high vibration applications.

1-Pc Cable Tie/Fir Tree Mount, 6.7" Long, Mounting Hole Diameter 0.24" - 0.26", PA66, Gray, 500/pkg

Article Number 157-00068

Type OS180FT7LH

Color Gray (GY)

Quantity Per bag

Product Description Fir tree mounts with ties cables provide a secure grip in mounting holes and protect against dirt and other impurities. The mount provides low insertion and high extraction force, and slides along the cable tie for the proper orientation. This is sold as an assembly with the cable tie.

Short Description 1-Pc Cable Tie/Fir Tree Mount, 6.7" Long, Mounting Hole Diameter 0.24" - 0.26", PA66, Gray, 500/pkg

Global Part Name OS180FT7LH-PA66-GY

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 200

Length L (Imperial) 7.0

Length L (Metric) 180.0

Fixation Method Fir tree for round holes

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Width W (Imperial) 0.21

Width W (Metric) 5.3

Bundle Diameter Min (Imperial) 0.06

Bundle Diameter Min (Metric) 1.6

Bundle Diameter Max (Imperial) 1.18

Bundle Diameter Max (Metric) 30.0

Thickness T (Metric) 1.4

Height H (Imperial)	0.7
Panel Thickness Min (Imperial)	0.03
Panel Thickness Max (Imperial)	0.18
Panel Thickness Min (Metric)	0.6
Panel Thickness Max (Metric)	4.5
Mounting Hole Diameter D (Imperial)	0.24 - 0.26
Mounting Hole Diameter D (Metric)	6.5 - 7.0 mm 6.35 mm (hexagonal)
Mounting Hole Diameter D Max (Metric)	7.0
Disc Diameter (Metric)	16.0
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
UV Resistant (Yes/No)	No
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes

Package Quantity (Imperial) 500

Package Quantity (Metric) 500

Customs Number 3926909988