


## T340C106K035AT7301

Aliases (T340C106K035ATTR)

T340, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 10 uF, 10%, 35 VDC, Lead Spacing = 5mm

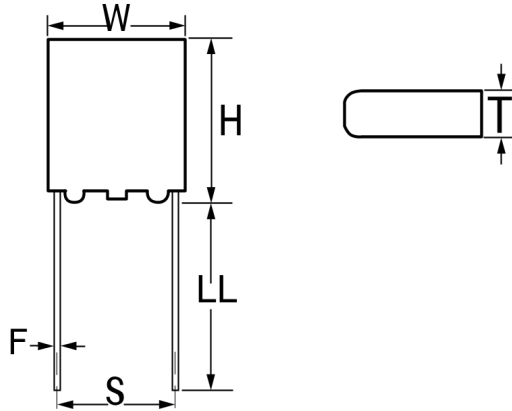

Click [here](#) for the 3D model.

Dimensions	
W	7.3mm MAX
H	10.5mm MAX
T	4.3mm MAX
S	5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

Packaging Specifications	
Packaging	T&R, 305mm
Packaging Quantity	1000

General Information	
Series	T340
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications	
Capacitance	10 uF
Capacitance Tolerance	10%
Voltage DC	35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	4 uA