

## WAU060-2000-G

### Electrical Specifications (@25C)

1. Primary Rating: 120V 60Hz
2. Primary Excitation Current: <4mA
3. Secondary Rating: 6VAC  $\pm$  5%, 2000mA AC
4. Secondary No-Load Rating: <7.8VAC Ref.
5. No Load Power (stand by):  $\leq$ 0.21W
6. Average Efficiency: 82.96%. Meets minimum level VI efficiency\*
7. Operating Temperature Range: -10 Deg C to +40 Deg C
8. Temperature Rise: 30 Deg C Max at rated load

### Mechanical Parameters:

Case Type: Thermoplastic molded enclosure.  
Output Cord: 18 AWG, 6 Ft. Long Min.

**Mating Connector:** MOLEX 43640-0300 or equivalent

**Warranty:** 10 Years

### Agency File:


UL/CUL: File E341931, UL 1310

### A. Dimensions:

H	W	D
79.6	59.7	48.1

\*Units: In Millimeter


### B. Schematic:



**DOE/CEC Compliance:** This power supply meets the minimum efficiency levels for direct operation as defined by DOE Docket Number EERE-2008-BT-STD-0005-0219.

**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

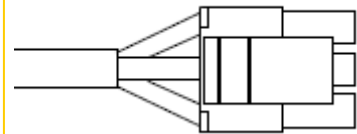

**TRIAD**

**CLASS 2 POWER SUPPLY**

**MODEL: WAU060-2000-G**

**INPUT: 120VAC 60Hz, 16W**

**OUTPUT: 6VAC @ 2000mA**

LISTED  
EPBU  
E341931

RoHS  
XXXX

**MADE IN CHINA**