


## Data sheet | Item number: 787-1732

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 10 A output current; DC-OK LED



[www.wago.com/787-1732](http://www.wago.com/787-1732)

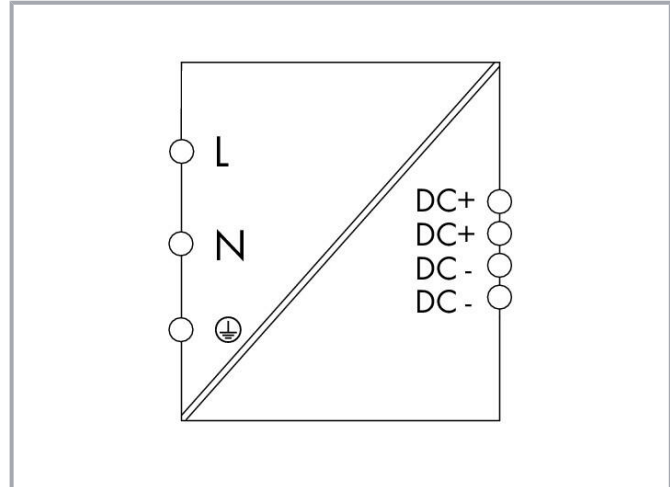

## Item description

### Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204
- DIN-35 rail mountable in different positions
- Direct installation on mounting plate via cable grip

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Data

### Technical data

#### Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 90 ... 264 V; DC 125 ... 375 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 2$ A (230 VAC); $\leq 4$ A (115 VAC)
Inrush current	$\leq 18$ A
Power factor correction (PFC)	Active
Mains failure hold-up time	$\geq 10$ ms (230 VAC)

#### Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Nominal output current $I_{o\text{ nom}}$	10 A (24 VDC; 110 ... 240 VAC); 8 A (24 VDC; 100 ... 240 VAC)
Nominal output power	240 W
Residual ripple	$\leq 200$ mV (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.4 \times I_{o\text{ nom}}$ ); Shutdown and automatic restart in the event of a short circuit

#### Signaling and Communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED ( $U_o$ )

#### Efficiency/power losses

Power loss $P_l$	$\leq 38$ W (230 VAC; 24 VDC; 10 A)
Efficiency (typ.)	91 % (230 VAC; 10 ADC)

#### Circuit protection

Internal fuse	F 3.15 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: B6, B10

Subject to changes. Please also observe the further product documentation!



## Safety and protection

Isolation voltage (sec.-PE)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes, for 2 devices of the same type
MTBF	> 300,000 h (per IEC 61709)

## Connection data

Connection type 1	Input/Output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

## Physical data

Width	70 mm / 2.756 inches
Height	165 mm / 6.496 inches
Depth from upper-edge of DIN-rail	99 mm / 3.898 inches

## Mechanical Data

Mounting type	DIN-35 rail Screw mount
---------------	----------------------------

## Material Data

Fire load	0.129 MJ
Weight	840 g

Subject to changes. Please also observe the further product documentation!



## Environmental requirements

Ambient temperature (operation)	-20 ... +60 °C
Ambient temperature (storage)	-25 ... +75 °C
Relative humidity	10 ... 95 % (no condensation permissible)
Derating	-4 %/K (> 45 °C)

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508 SEMI F47

## Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143375221
Customs tariff number	85044083900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	0a97bf33-131c-407b-acfb-5acb8cc93417
SCIP notification number (Czech Republic)	11509a2d-34b9-4c66-ac52-057fde5e372d

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B.

Subject to changes. Please also observe the further product documentation!



UL  
Underwriters Laboratories Inc.

UL 508

E255817





UL  
Underwriters Laboratories Inc.

UL 60950-1

E255815

#### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
	UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

#### Optional accessories

##### Tool

##### Operating tool



Item no.: 210-769  
SCREWDRIVER; green

[www.wago.com/210-769](http://www.wago.com/210-769)

Item no.: 210-720  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

##### Marking accessories

##### Marking strip



Item no.: 210-831  
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

[www.wago.com/210-831](http://www.wago.com/210-831)

Item no.: 210-832  
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

[www.wago.com/210-832](http://www.wago.com/210-832)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Downloads

### Documentation

#### Bid Text

787-1732 docx - Datei	2019 Oct 1	docx 21.1 kB	Download
787-1732 X81 - Datei	2019 Oct 1	xml 7.0 kB	Download
ausschreiben.de 787-1732		URL	Download

#### Instruction Leaflet

ECO Power Switched-Mode Power Supplies 24 VDC, 10 A	V 1.4 2020 Dec 21	pdf 270.9 kB	Download
--	----------------------	-----------------	----------

#### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 787-1732		URL	Download
-----------------------	--	-----	----------

### CAE data

EPLAN Data Portal 787-1732		URL	Download
----------------------------	--	-----	----------

ZUKEN Portal 787-1732		URL	Download
-----------------------	--	-----	----------

WSCAD Universe 787-1732		URL	Download
-------------------------	--	-----	----------

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 787-1732		URL	Download
---	--	-----	----------

Subject to changes. Please also observe the further product documentation!



Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 10 A output current; DC-OK LED

---

## Installation Notes

## Product family

**EPSITRON ECO Power**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.