


REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
NA	2018/09/13	A	INITIAL RELEASE	CISSY

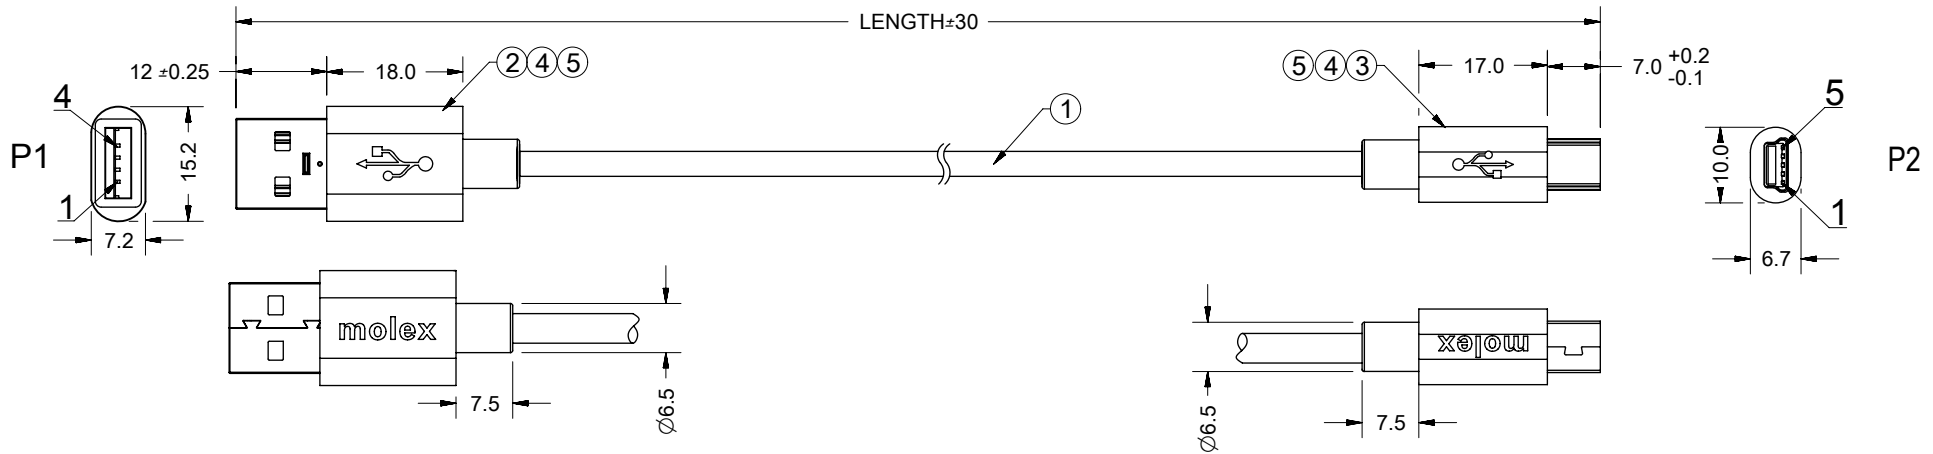

PART NO.	LENGTH	DESCRIPTION
687680404	L=1000MM	USB2.0 A to USB2.0 miniB L=1M
687680405	L=1500MM	USB2.0 A to USB2.0 miniB L=1.5M
687680406	L=2000MM	USB2.0 A to USB2.0 miniB L=2M

SHELL	BRAID WIRE	SHELL
4	BLACK	5
3	GREEN	3
2	WHITE	2
1	RED	1
P1	WIRE COLOR	P2
PIN ASSIGNMENTS		

ITEM	DESCRIPTION	QTY'
5	OUTMOLDED PVC BLACK	A/R
4	INNER MOLDED LDPE	A/R
3	MNI 5P USB B PLUG, CONTACTS: GOLD 1u" PLATED,SHELL: NICKEL PLATED,	1
2	USB A TYPE PLUG, CONTACTS: GOLD 1u" PLATED,SHELL: NICKEL PLATED,	1
1	USB CABLE 28AWG*1P+26AWG*2C+AEB JACKET BLACK	1

NOTE:

- OUTMOLDED WITH BLACK PVC RESIN
INNER MOLDER WITH PE RESIN
- ELECTRICAL PERFORMANCE:
 - RATED CURRENT:1.0A
 - RATED VOLTAGE:30V AC
 - THIS PRODUCT MUST MEET USB 2.0 STANDARD.
- THIS PRODUCT MUST MEET THE EU RoHS CHEMICAL SUBSTANCES SPECIFICATION FOR PRODUCTS (2011/65/EU)
- APPLICATION CONDITION:
 - WORKING CONDITION (TEMPERATURE:0°---+50°)
 - STORE CONDITION (TEMPERATURE:-20°---+60°)

SYMBOLS THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS: mm SCALE: 1:1 CURRENT REV DESC: EC NO: 604448 DRWN: ZZXIAN 2018/09/13 CHK'D: CWANG49 2018/09/14 APPR: LHLIU 2018/09/14 INITIAL REVISION: DRWN: ZZXIAN 2018/08/16 APPR: LHLIU 2018/09/14 DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS THIRD ANGLE PROJECTION 	 SEE TABLE	
	PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2012410604 DOC TYPE: PSD DOC PART: 000 REVISION: A MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2018/09/14	09:50:22
-----------------	----	--------------	------------	----------