



REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Conn.

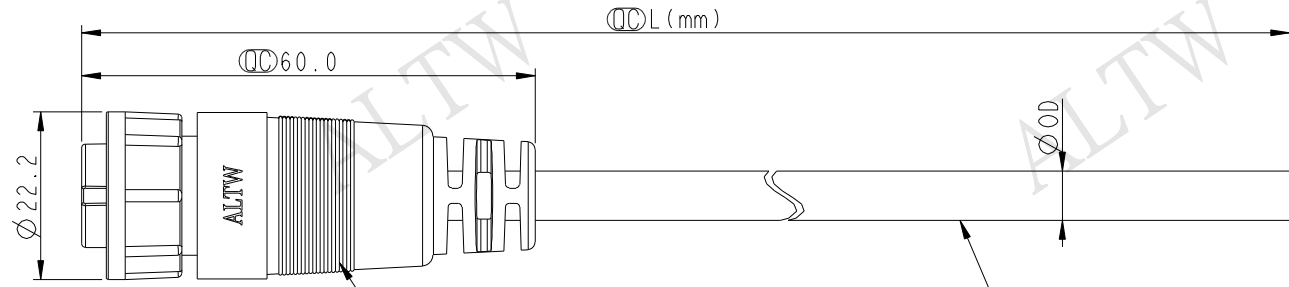


① ACB-XXAFFM-LL7000
Color: Black

② Cable

6P	PVC	6.5	20	ACB-06AFFM-LL7AXX
5P		6.0		ACB-05AFFM-LL7AXX
4P		5.5		ACB-04AFFM-LL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

6	Gray 灰	5	Green 綠	4	White 白
5	Yellow 黃	4	White 白	3	Black 黑
4	Green 綠	3	Black 黑	2	Blue 藍
3	White 白	2	Blue 藍	1	Brown 棕
2	Blue 藍	1	Brown 棕		
1	Brown 棕				
Pin #	Wire	Pin #	Wire	Pin #	Wire

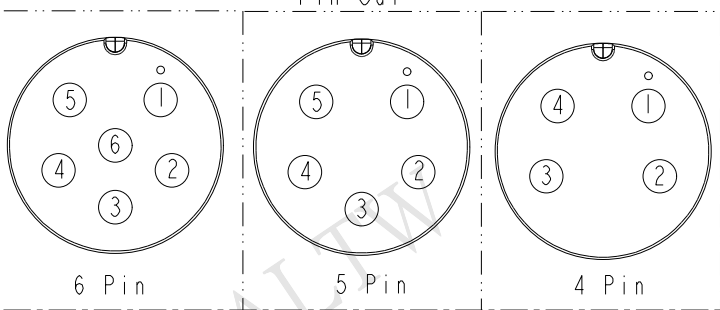


Pin Assignments Front View

ACB-XXAFFM-LL7AXX

04: 4Pin
06: 6Pin

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
...
99 : 99Meters

Cable Length(L): 01~99Meters



- Note:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Lock Nut: Nylon+GF, Black.
 - * Cable: UL2464 20AWG+D+Al/My
 - * PVC Jacket UV Resistant, Black.
 - * Cable Length Tolerance:
 - 01M: 40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT:mm		TITLE	MIDDLE CABLE LOCK F CONN F PIN		
TOLERANCE	±0.5	SCALE	1:1	SIZE	A4
		REV.	A	WC-REV.	A.1
				\varnothing	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Jinhai	2015-07-16
DWG NO	CHECKED BY	DATE
ACB-XXAFFM-LL7AXX	Rensong	2015-07-16
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2015-07-16

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.