


Data sheet | Item number: 787-1216

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage;
4.2 A output current; DC-OK LED

www.wago.com/787-1216

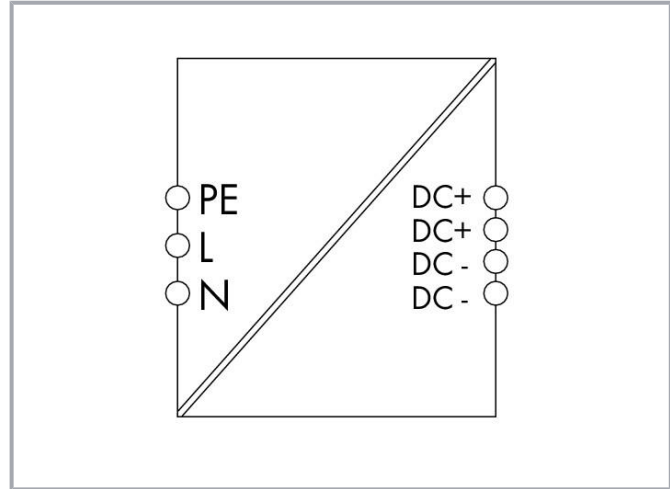

Item description

Features:

- Switched-mode power supply
- Stepped profile for installation in standard distribution boards
- Screw mounts for alternative installation in distribution boxes or devices
- Pluggable *picoMAX*[®] Connection Technology (tool-free)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60335-1 and UL 60950-1; PELV per EN 60204

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i \text{ nom}}$	1 x AC 100 ... 240 V
Input voltage range	1 x AC 85 ... 264 V; DC 125 ... 375 V

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Input voltage derating	-2 %/V (< 100 VAC); -1.33 %/V (< 140 VDC)
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current I_i	≤ 2.5 A
Inrush current	≤ 20 A
Power factor	≥ 0.5
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 50 ms

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 22 ... 26 V (adjustable)
Nominal output current $I_{o\text{ nom}}$	4.2 A; 3.3 A (< 110 VAC)
Nominal output power	100 W
Residual ripple	≤ 100 mV (peak-to-peak)
Overload behavior	Constant power (in overload range: $1.05 \dots 1.35 \times I_{o\text{ nom}}$); Shutdown and automatic restart in the event of a short circuit or permanent overload

Signaling and Communication

Signaling	1 x LED DC OK (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_l	≤ 0.7 W
Power loss (max.) $P_{l(\text{max})}$	15 W (100 VAC / 24 VDC; 4.2 A)
Efficiency (typ.)	90 % (230 VAC); 87 % (110 VAC)

Circuit protection

Internal fuse	T 3.15 A / 500 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 6 A (C characteristic), 10 A (B characteristic) or higher

Subject to changes. Please also observe the further product documentation!



Safety and protection

Protection class	I
Protection type	IP20; per EN 60529
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	≤ 31 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/Output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	<i>picoMAX</i> ® 5.0, WAGO 2092 Series
Solid conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Fine-stranded conductor	0.2 ... 2.5 mm ² / 24 ... 12 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

Physical data

Width	108 mm / 4.252 inches
Height	90 mm / 3.543 inches
Depth	56 mm / 2.205 inches
Depth from upper-edge of DIN-rail	52.5 mm / 2.067 inches
Note (dimensions)	Depth: 48 mm (without cover)

Mechanical Data

Mounting type	DIN-35 rail Screw mount (back/side)
---------------	--

Material Data

Flammability class per UL94	V0
Weight	456.9 g

Subject to changes. Please also observe the further product documentation!

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	95% (no condensation permissible)
Derating	-2.66 %/K (> 55 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 60335-1 EN 62368-1 UL 60950-1 UL 508

Commercial data


eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143907804
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Czech Republic)	eb73b17d-78c9-4111-8352-17210dfcbfc9

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02. B. 00089_19
	UL	UL 508	E255817

Subject to changes. Please also observe the further product documentation!



Underwriters Laboratories Inc.

UL


UL 60950-1

E255815



Underwriters Laboratories Inc.

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool



Item no.: 210-769
SCREWDRIVER; green

www.wago.com/210-769

Item no.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Strain relief

Strain relief plate



Item no.: 2092-1601
Gripping plate; for female and male connectors; 1 part; Pin spacing 5 mm; 3- to 4-pole; light gray

www.wago.com/2092-1601

Downloads

Documentation

Manual

Product Manual COMPACT Power; 1-phase DC 24 V / 4.2 A	V 1.0.1 2021 Jan 21	pdf 1.6 MB	Download
--	------------------------	---------------	----------

Bid Text

787-1216	2019 Jul 4	xml	Download
----------	------------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



X81 - Datei			7.4 kB	
787-1216 docx - Datei	2019 Jun 12	docx	21.2 kB	Download
ausschreiben.de 787-1216		URL		Download

Instruction Leaflet

Primär getaktete Stromversorgungen COMPACT DC 24 V, 4,2 A		pdf	1.6 MB	Download
--	--	-----	--------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf	2.2 MB	Download
---	------------------------	-----	--------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 787-1216		URL		Download
WSCAD Universe 787-1216		URL		Download
ZUKEN Portal 787-1216		URL		Download

CAD data

2D/3D Models 787-1216		URL		Download
-----------------------	--	-----	--	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-1216 Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4.2 A output current; DC-OK LED		URL		Download
---	--	-----	--	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!



Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.