


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/30/00	PS
B	UPDATE TO NEW FORMAT, RFS.10695, BS	04/17/07	BS
C	UPDATE END 'B', RFS.18277, BS	03/12/10	BS

A

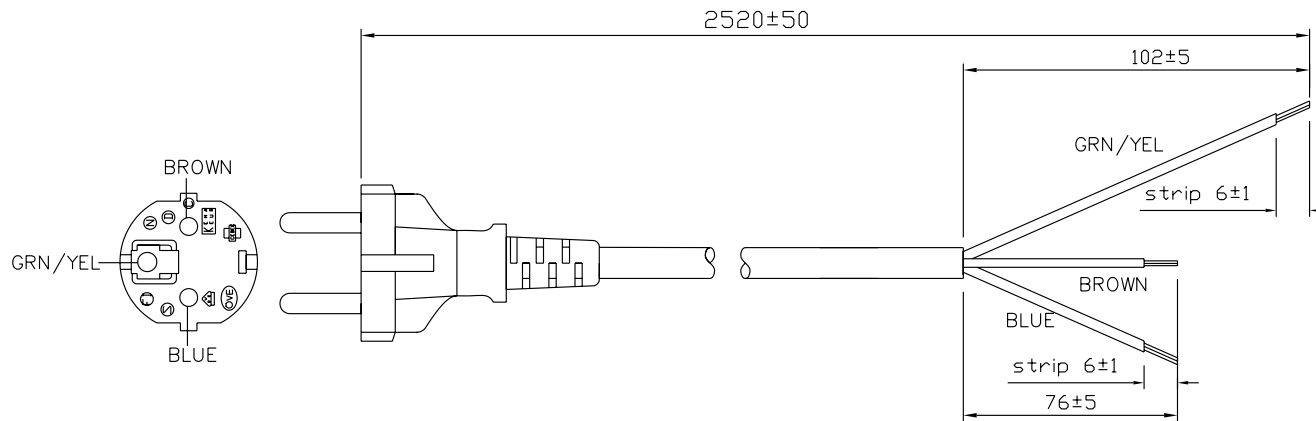

B



GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC
 CABLE TYPE / SIZE: H05VV-F, 3 x 1.0 mm²
 TEMPERATURE RATING: 70° C
 CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2520 ± 50 mm
 CABLE OUTER DIAMETER: 7.0 ± 0.1 mm
 END 'A' PLUG: CEE 7/7
 END 'B' : SEE TERMINATION TABLE
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, CEBEC, OVE
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, CEBEC, OVE

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ ± 5 mm	RIJ±1 mm	Terminal
Ground	Green-Yellow	102	6	Strip
Neutral	Blue	76	6	Strip
Line	Brown	76	6	Strip

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS DATE: 04/17/07		DWG TITLE: EUROPEAN NON-DETACHABLE CORDSET		REV. C
DRAWN: NF DATE: 04/17/07		FSCN No.: G, CC SIZE: A		
APRVD: HM DATE: 04/17/07		SCALE: NONE		PART NO: 23144272M5002(R) SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice