


# R413R3330JE00K

## Aliases (413R3330JE00K)

R41, Film, Metallized Polypropylene, Safety, 0.33 uF, 10%, 300 VAC (Y2), 1000 VDC, 110°C, Lead Spacing = 27.5mm

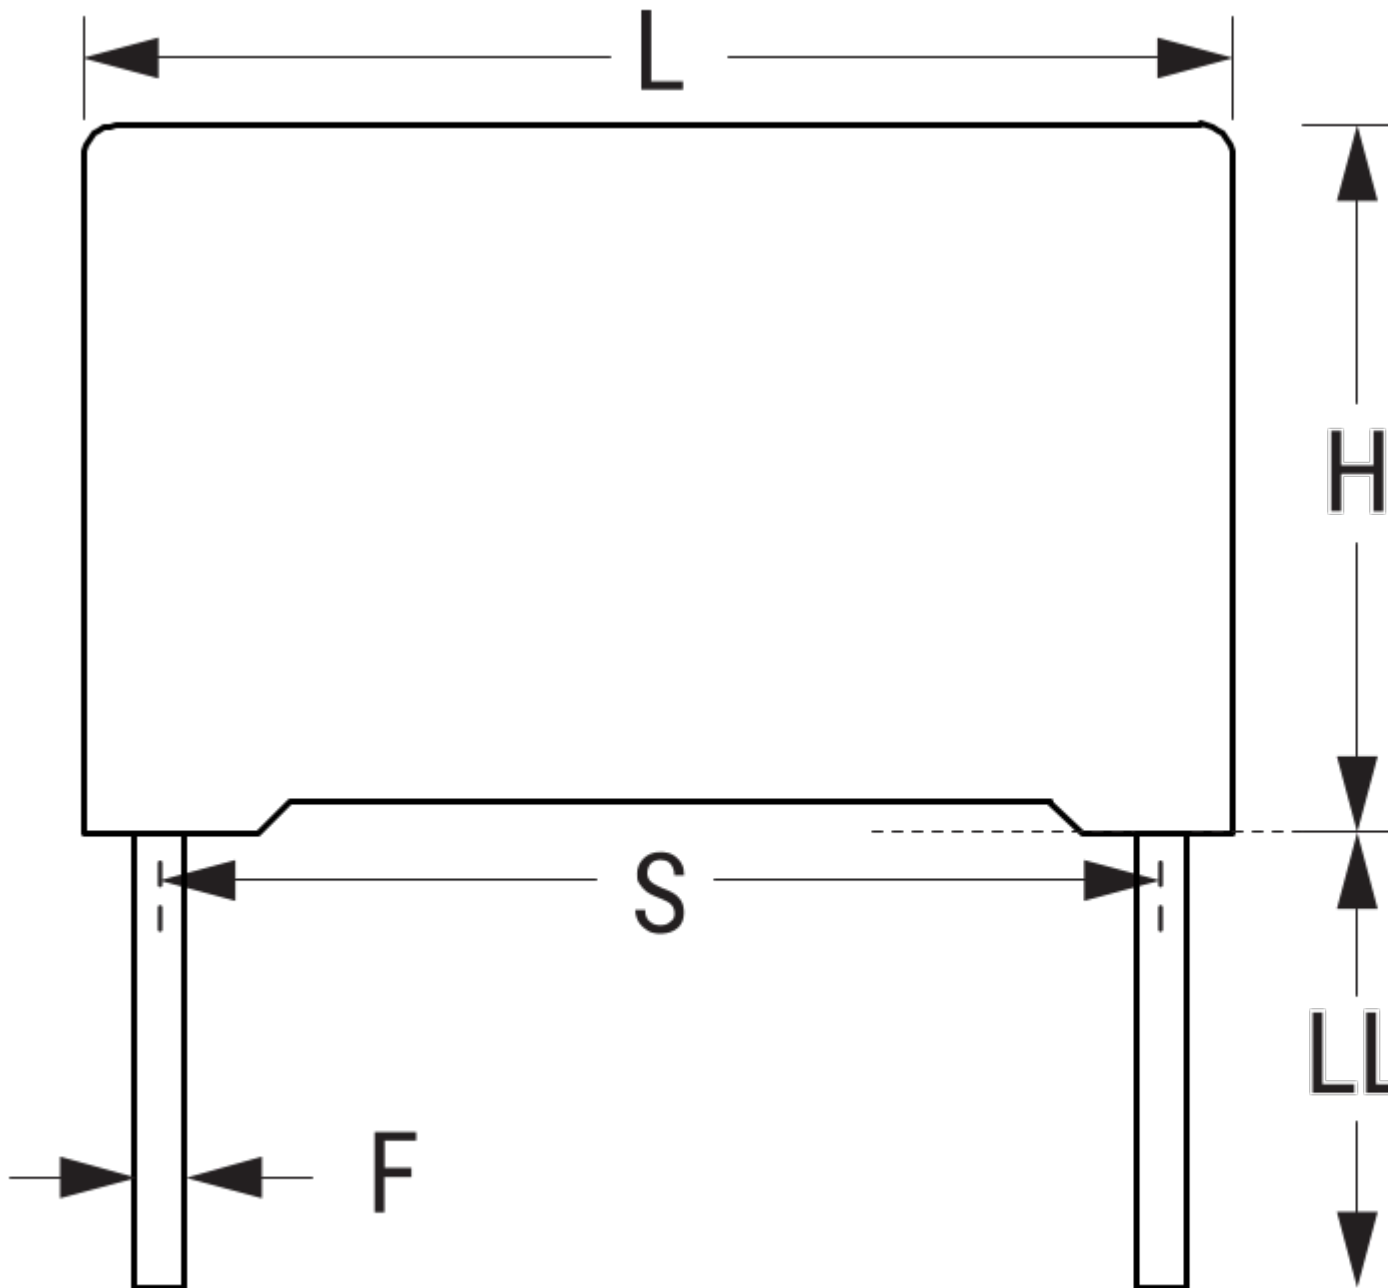

Click [here](#) for the 3D model.

### Dimensions

L 32mm +0.3/-0.7mm

H 28mm +0.1/-0.7mm

### Dimensions

T 14mm +0.2/-0.7mm  
S 27.5mm +/-0.4mm  
LL 4mm +0.5mm  
F 0.8mm +/-0.05mm

### Packaging Specifications

Packaging Tray  
Packaging Quantity 352

### General Information

Series R41  
Dielectric Metallized Polypropylene  
Style Radial  
Features EMI Safety  
RoHS Yes  
Lead Cut  
Safety Class Y2  
Qualifications ENEC, UL, cUL, CQC  
AEC-Q200 No  
THB Performance No  
Component Weight 13.58 g

### Specifications

Capacitance 0.33 uF  
Capacitance Tolerance 10%  
Voltage AC 300 VAC (Y2)  
Voltage DC 1000 VDC  
Temperature Range -40/+110°C  
Rated Temperature 110°C  
Dissipation Factor 0.2% 1kHz  
Insulation Resistance 100 GOhms  
Max dV/dt 400 V/us

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 5f9dc030-38bf-4d07-ae95-d78ee7b9f0f6  
© 2006 - 2023 KEMET  
Generated 5/18/2023 - 5f9dc030-38bf-4d07-ae95-d78ee7b9f0f6  
© 2006 - 2023 KEMET