

VIRPI-S

~15° spot beam

SPECIFICATION:

Dimensions	74.9 x 74.9 mm
Height	9.5 mm
Fastening	glue, pin
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
VIRPI-S	Multi-lens	PMMA	clear	

ORDERING INFORMATION:




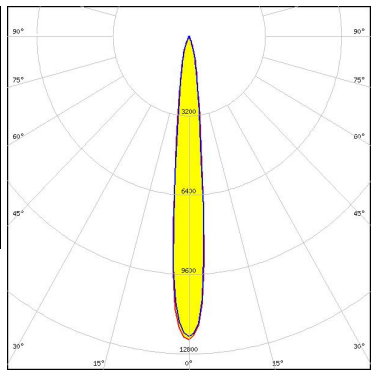
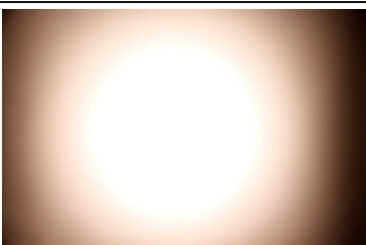
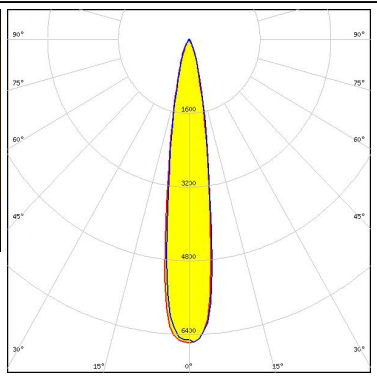
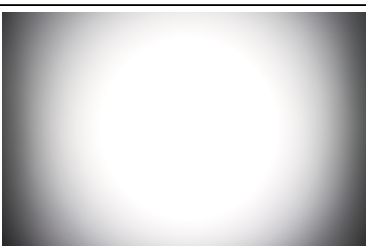
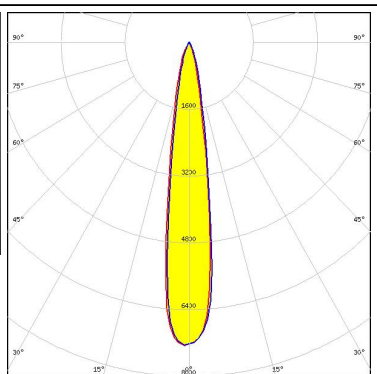
Component	Qty in box	MOQ	MPQ	Box weight (kg)
C12607_VIRPI-S » Box size: 480 x 280 x 300 mm	360	45	15	12.0



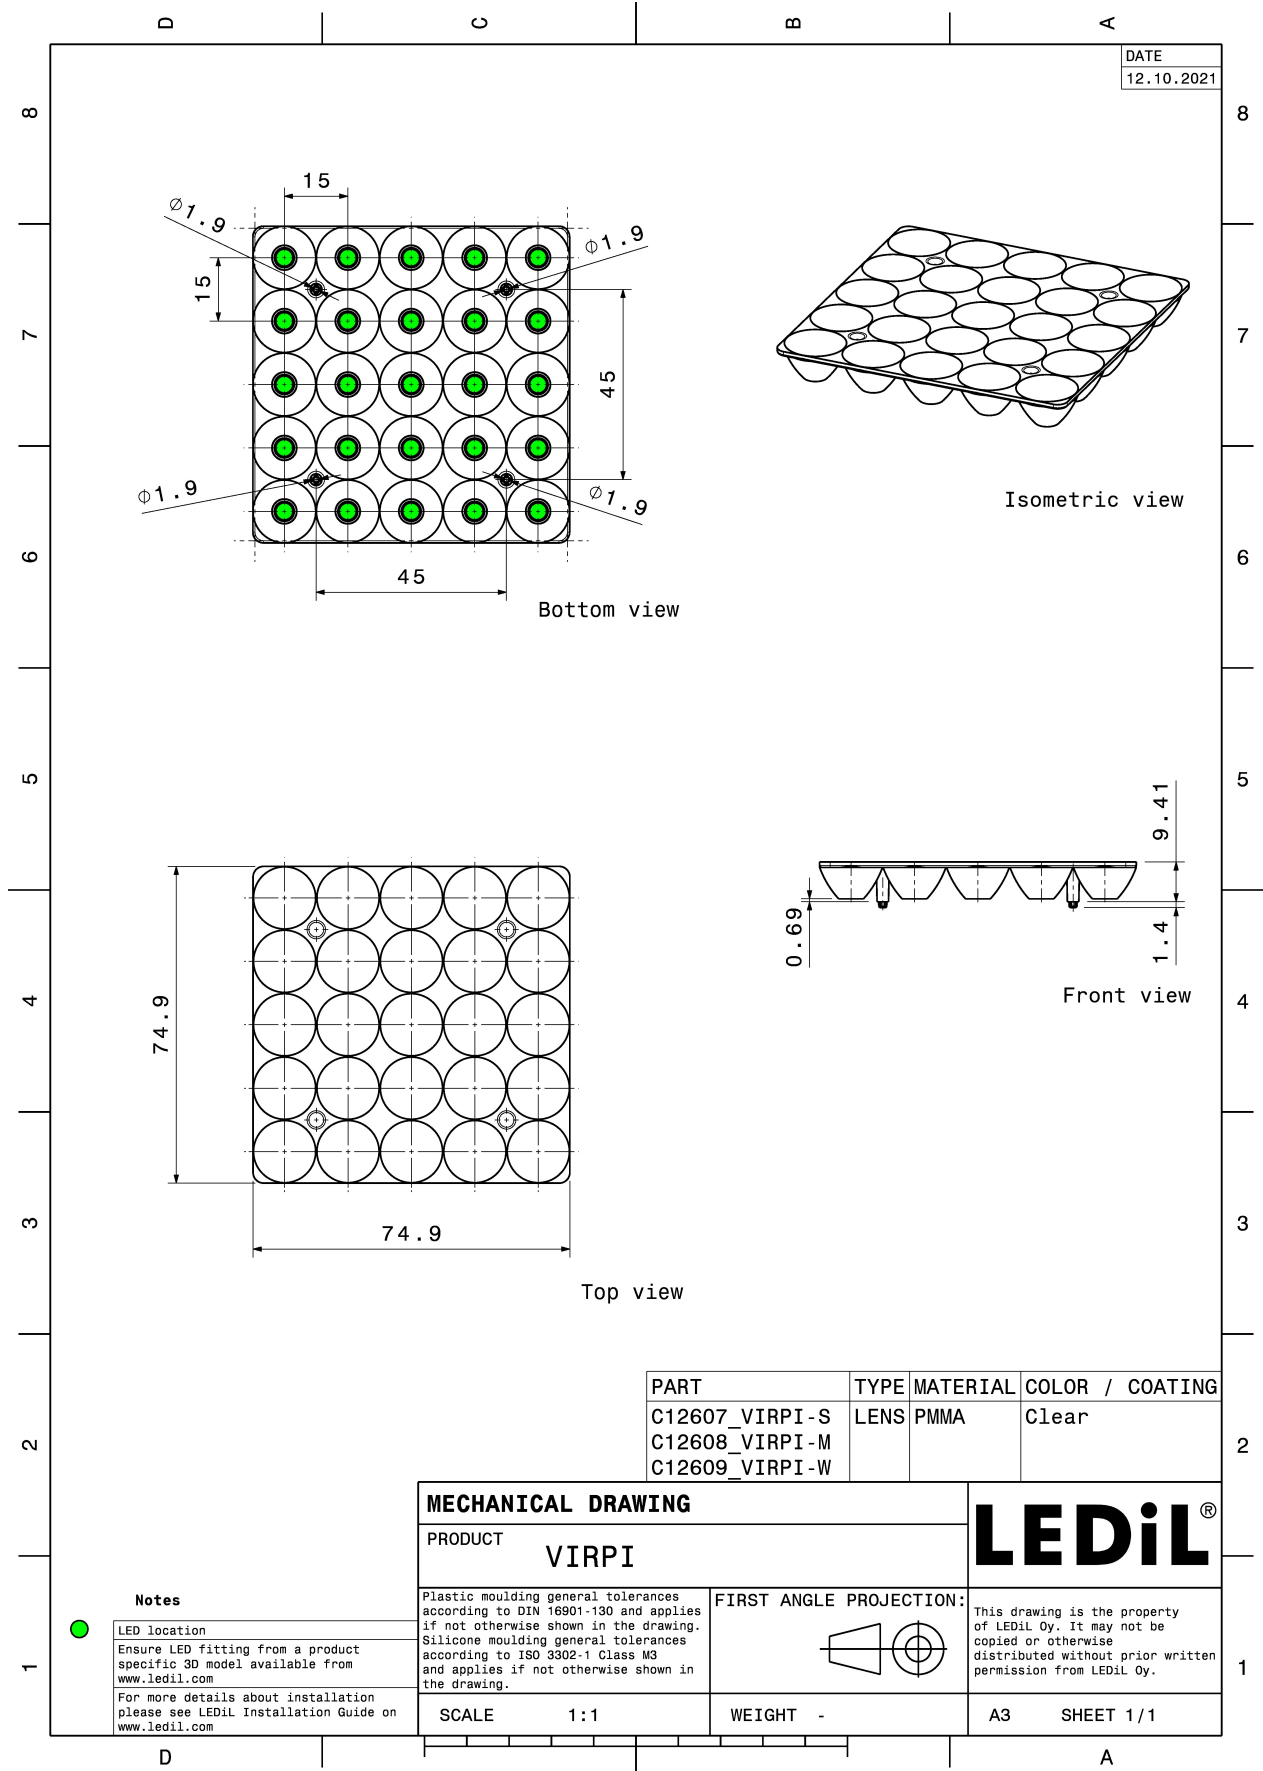

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):
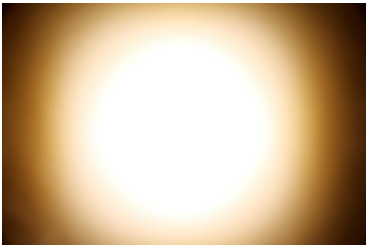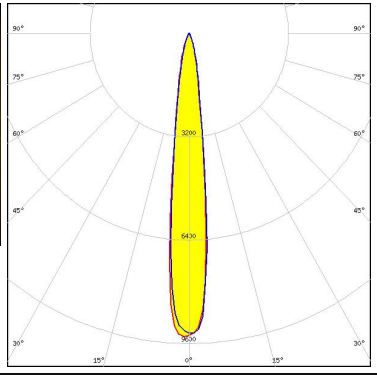
<p>CREE → LED</p> <p>LED XB-D FWHM / FWTM 13.0° / 30.0° Efficiency 92 % Peak intensity 9.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XP-E2 FWHM / FWTM 11.0° / 27.0° Efficiency 94 % Peak intensity 12.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XP-G FWHM / FWTM 16.0° / 36.0° Efficiency 94 % Peak intensity 6.5 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>CREE → LED</p> <p>LED XP-G2 FWHM / FWTM 16.0° / 34.0° Efficiency 94 % Peak intensity 7.3 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		



OPTICAL RESULTS (MEASURED):





LED XT-E
 FWHM / FWTM 15.0° / 34.0°
 Efficiency 94 %
 Peak intensity 7.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

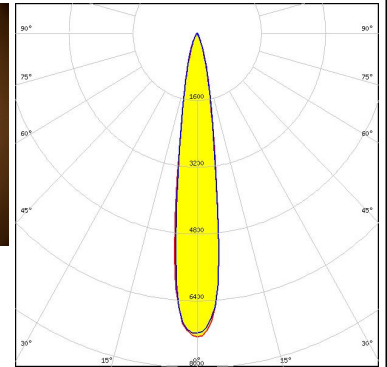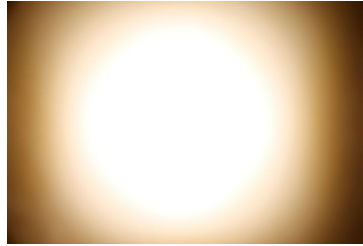



LED LUXEON Rebel ES
 FWHM / FWTM 16.0° / 29.0°
 Efficiency 94 %
 Peak intensity 6.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

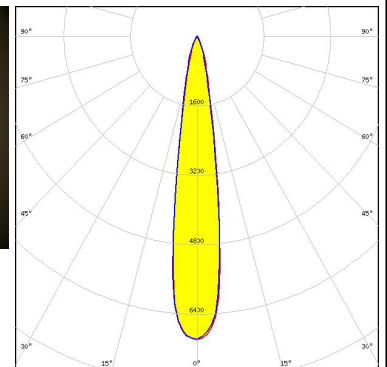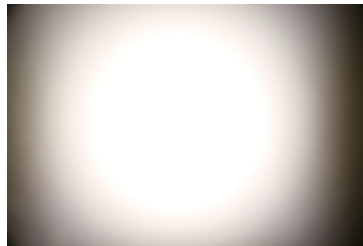

LED NVSxx19A
 FWHM / FWTM 16.0° / 34.0°
 Efficiency 93 %
 Peak intensity 6.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

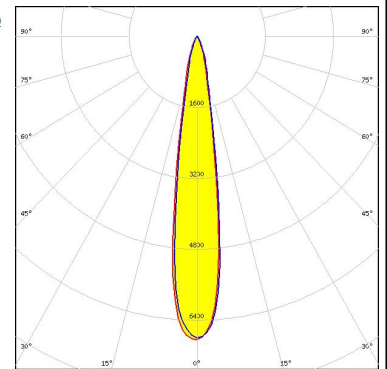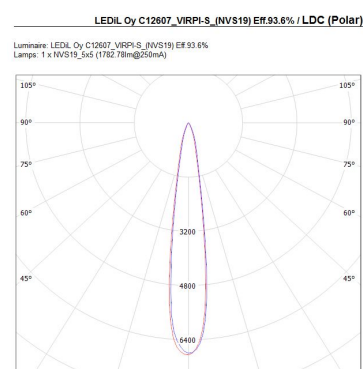


LED OSLOM Square EC
 FWHM / FWTM 15.0° / 31.0°
 Efficiency 94 %
 Peak intensity 8.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

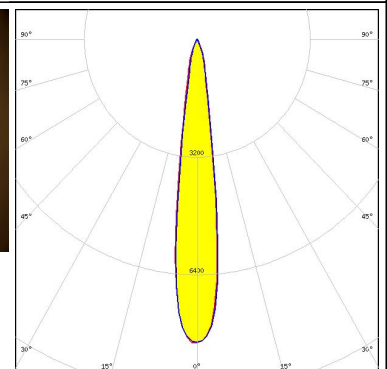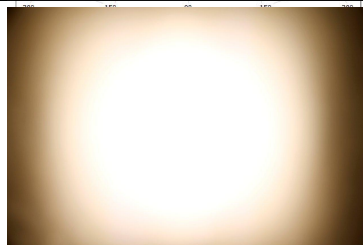


OPTICAL RESULTS (SIMULATED):




LED J Series 3030
 FWHM / FWTM 14.0° / 28.0°
 Efficiency 95 %
 Peak intensity 11.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

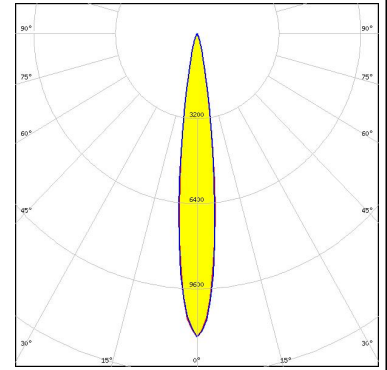


LED XD16
 FWHM / FWTM 14.0° / 30.0°
 Efficiency 94 %
 Peak intensity 9.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

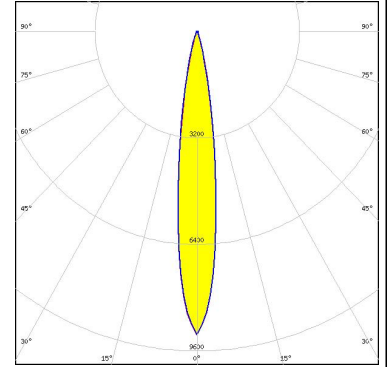

LED LUXEON C
 FWHM / FWTM 11.0° / 25.0°
 Efficiency 86 %
 Peak intensity 14.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

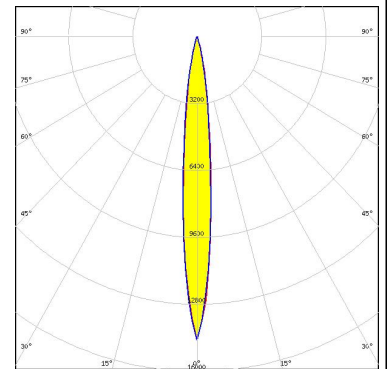

LED LUXEON CZ
 FWHM / FWTM 8.8° / 19.0°
 Efficiency 94 %
 Peak intensity 26 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

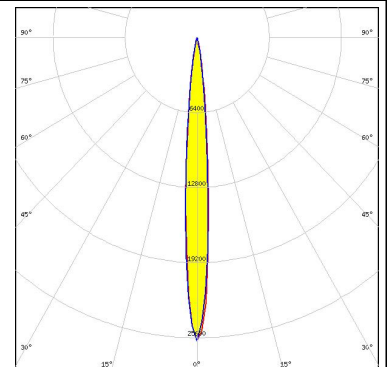


OPTICAL RESULTS (SIMULATED):

LUMILEDS


LED LUXEON HL1Z
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 88 %
 Peak intensity 19.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

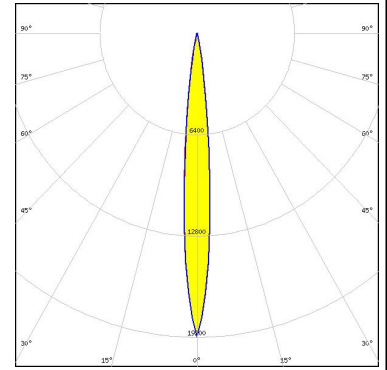


LUMILEDS

LED LUXEON HL1Z
 FWHM / FWTM 10.0° / 20.0°
 Efficiency 96 %
 Peak intensity 20.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

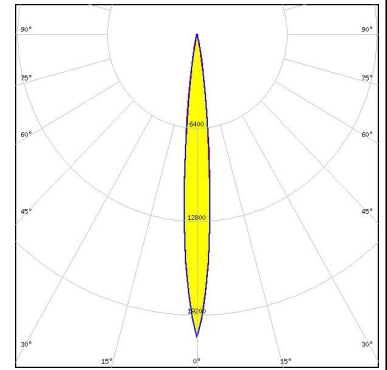

LUMILEDS


LED LUXEON HL2Z
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 97 %
 Peak intensity 11.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

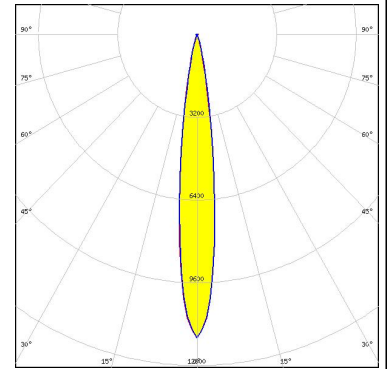





LUMILEDS

LED LUXEON HL2Z
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 90 %
 Peak intensity 11 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

Protective plate, glass

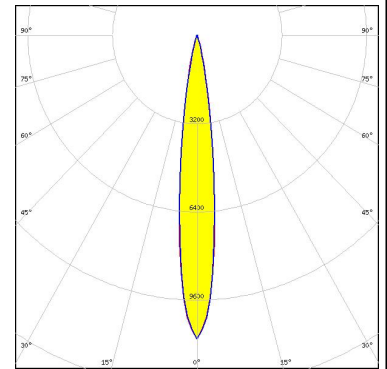


OPTICAL RESULTS (SIMULATED):
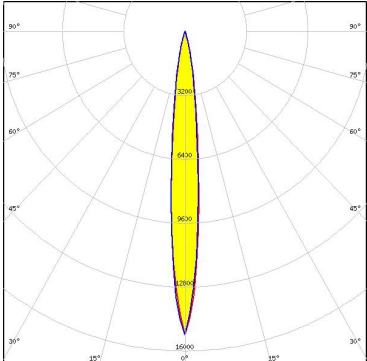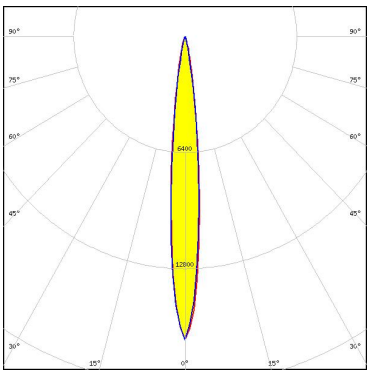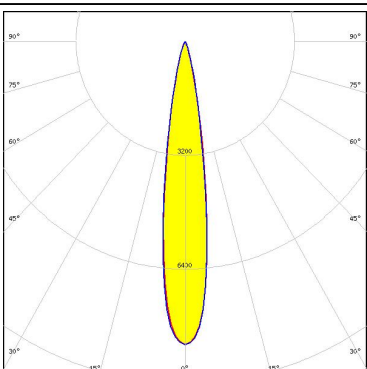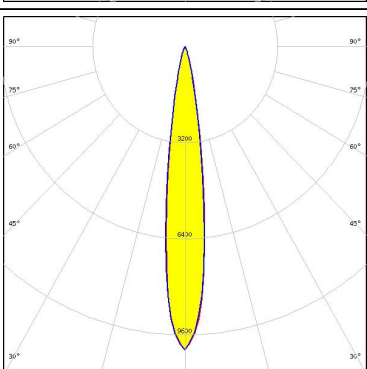
<p>LUMILEDS</p> <p>LED LUXEON SunPlus 20 Line (150 deg)</p> <p>FWHM / FWTM 13.0° / 25.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 15.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON SunPlus 35 Line</p> <p>FWHM / FWTM 12.0° / 23.0°</p> <p>Efficiency 94 %</p> <p>Peak intensity 16 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON T</p> <p>FWHM / FWTM 16.0° / 31.0°</p> <p>Efficiency 93 %</p> <p>Peak intensity 8.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>LUMILEDS</p> <p>LED LUXEON TX</p> <p>FWHM / FWTM 15.0° / 29.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 10.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	


OPTICAL RESULTS (SIMULATED):




LED SST-10-B130
 FWHM / FWTM 12.0° / 27.0°
 Efficiency 95 %
 Peak intensity 13.1 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

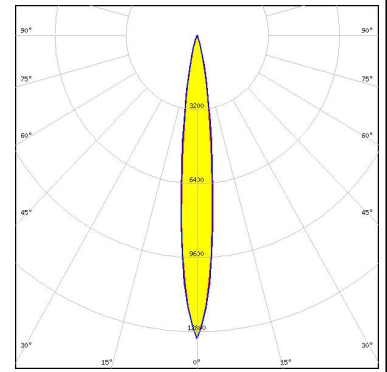


LED SST-20
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 95 %
 Peak intensity 13.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

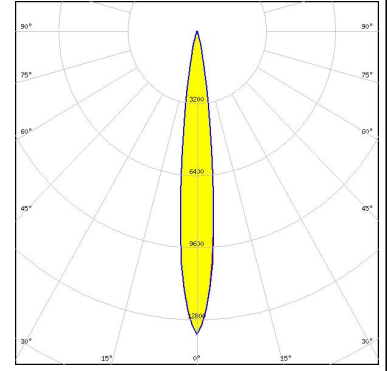

LED NVSxE21A
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 95 %
 Peak intensity 12.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

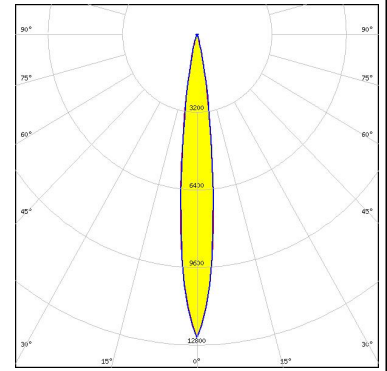


LED NVSxx19B/NVSxx19C
 FWHM / FWTM 18.0° / 33.0°
 Efficiency 94 %
 Peak intensity 7.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

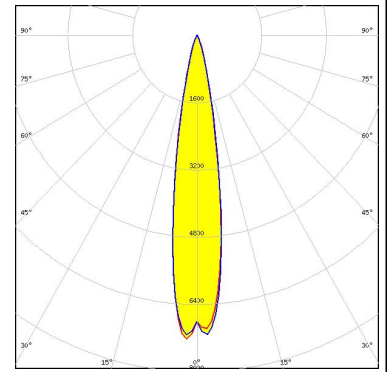

OPTICAL RESULTS (SIMULATED):


OSRAM Opto Semiconductors

LED OSCONIQ P 3030
 FWHM / FWTM 10.0° / 22.0°
 Efficiency 95 %
 Peak intensity 18.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

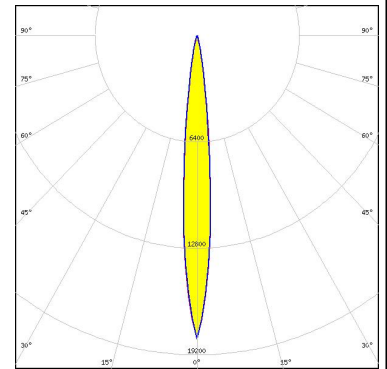


OSRAM Opto Semiconductors

LED OSLON SSL 150
 FWHM / FWTM 14.0° / 28.0°
 Efficiency 96 %
 Peak intensity 11.4 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

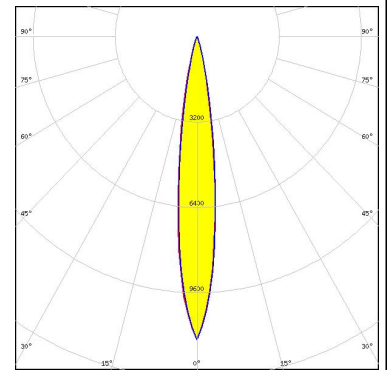


OSRAM Opto Semiconductors

LED OSLON SSL 80
 FWHM / FWTM 14.0° / 30.0°
 Efficiency 95 %
 Peak intensity 9.7 cd/lm
 LEDs/each optic 1
 Light colour Red
 Required components:

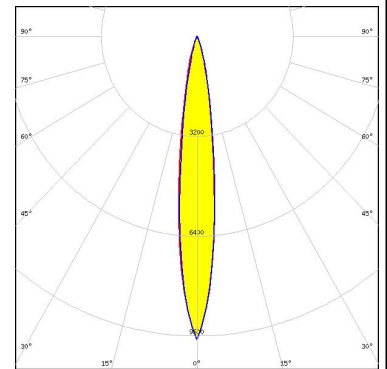

OSRAM Opto Semiconductors


LED SFH 4715AS
 FWHM / FWTM 13.0° / 24.0°
 Efficiency 94 %
 LEDs/each optic 1
 Light colour IR
 Required components:

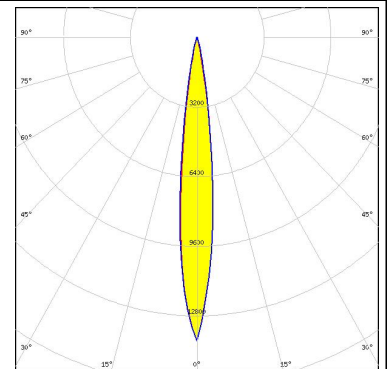

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LH181B
 FWHM / FWTM 14.0° / 28.0°
 Efficiency 95 %
 Peak intensity 10.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

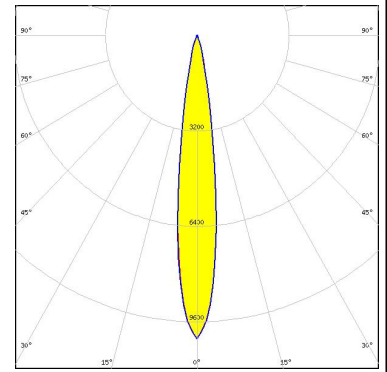


SAMSUNG

LED LH351B
 FWHM / FWTM 17.0° / 33.0°
 Efficiency 97 %
 Peak intensity 7.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

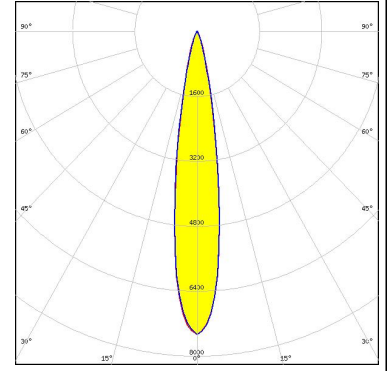


SAMSUNG

LED LH351C
 FWHM / FWTM 18.0° / 34.0°
 Efficiency 97 %
 Peak intensity 7.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

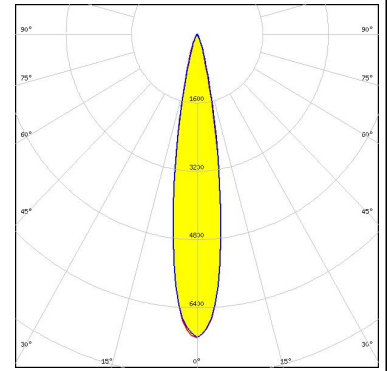

SAMSUNG


LED LH351D
 FWHM / FWTM 22.0° / 42.0°
 Efficiency 96 %
 Peak intensity 4.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

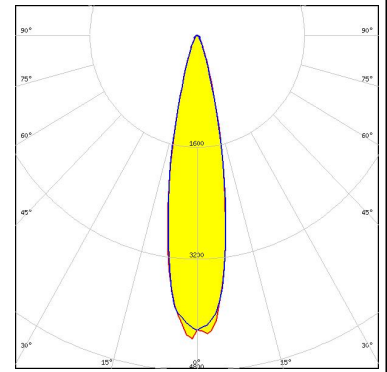


OPTICAL RESULTS (SIMULATED):

SAMSUNG


LED LM301B
 FWHM / FWTM 12.0° / 26.0°
 Efficiency 96 %
 Peak intensity 12.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

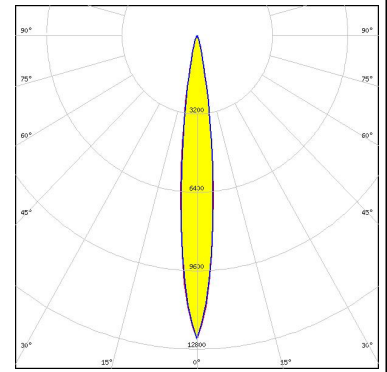


SEOUL SEMICONDUCTOR
 LED SEOUL DC 3030
 FWHM / FWTM 14.9° / 29.9°
 Efficiency 94 %
 Peak intensity 9.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

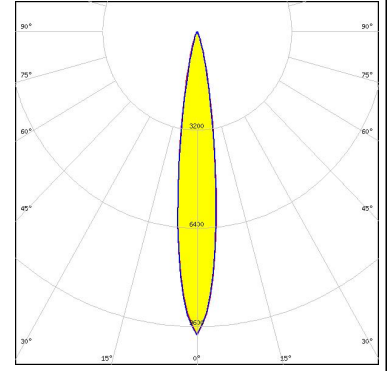

SEOUL SEMICONDUCTOR
 LED Z5M1/Z5M2
 FWHM / FWTM 15.0° / 29.0°
 Efficiency 98 %
 Peak intensity 9.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

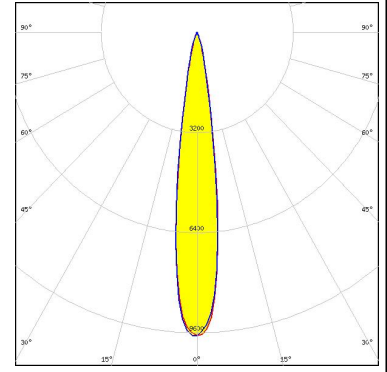

SEOUL SEMICONDUCTOR
 LED Z8Y19
 FWHM / FWTM 14.0° / 26.0°
 Efficiency 94 %
 Peak intensity 11.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

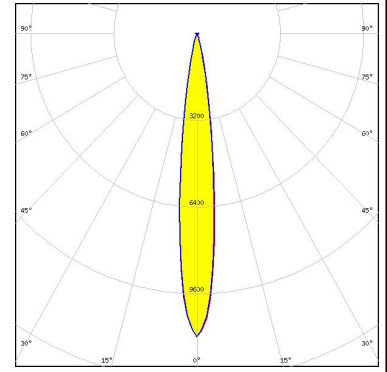

OPTICAL RESULTS (SIMULATED):



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)