

Click to  
**ORDER**  
samples

## AMED100-NZ



DIN Rail

The AMED100-NZ is whole new DIN rail bracket AC-DC converter featuring a cost effective, energy efficient solution. The products offer a high level of stability and immunity to noise, compliant with international IEC/EN/UL62368 and EN61558 standards. These lightweight AC-DC converters also have an extremely compact design for space saving and are ideal for applications such as industrial control equipment machinery and numerous applications for harsh environments.


This new series offers great operating temperatures, from -40°C to 70°C and an isolation of 4000VAC for improved reliability and system safety. Furthermore, a high MTBF of 300,000h, output short circuit protection (OSCP), output over-current protection (OCP) and an output over-voltage protection (OVP) come standard with the series.

## Features


- Universal Input: 85 - 264VAC/120 - 370VDC
- Operating Temp: -40 °C to +70 °C
- High isolation voltage: 4000VAC
- Low ripple & noise, 240mV(p-p), max.
- Output short circuit, over-current, over-voltage protection
- Overvoltage category III (OVC III)




## Summary

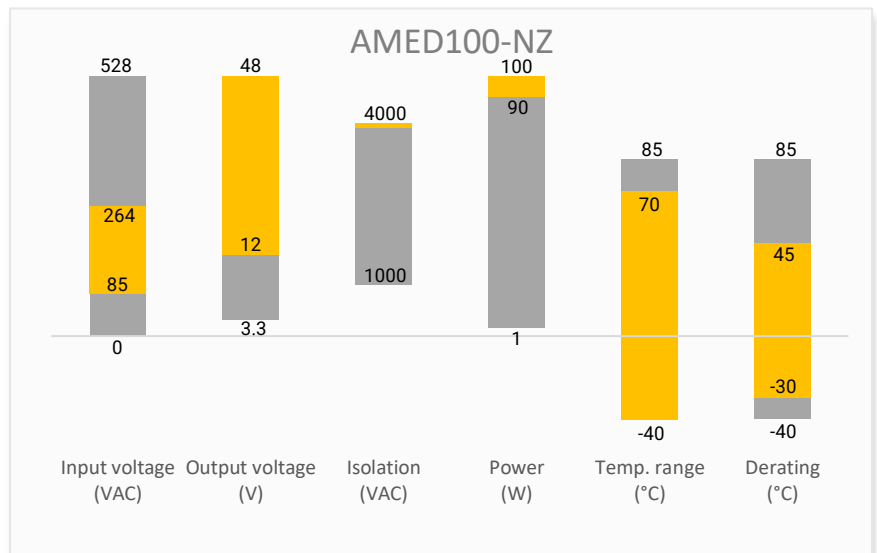

## Training

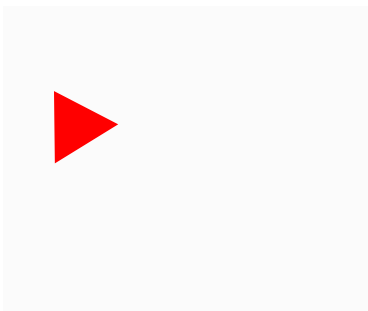

Product Training Video  
(click to open)



Application Notes

## Applications



Power Grid



Industrial



Telecom



Instrumentation

## Models & Specifications

Single Output							
Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (mA)	Maximum capacitive load ( $\mu$ F)	Efficiency @ 230VAC Typ. (%)
AMED100-12SNZ	85~264/47~63	120~370	90	12	7500	10000	88
AMED100-15SNZ	85~264/47~63	120~370	97.5	15	6500	6400	89
AMED100-24SNZ	85~264/47~63	120~370	100.8	24	4200	2500	90
AMED100-48SNZ	85~264/47~63	120~370	100.8	48	2100	1100	90

Input Specifications				
Parameters	Conditions	Typical	Maximum	Units
Input Current	115VAC		3000	mA
	230VAC		1600	mA
Inrush Current	115VAC	35		A
	230VAC	70		A
Leakage Current	240VAC / 50Hz		0.5	mA RMS



Output Specifications				
Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	0 - 100% load	$\pm 2$		%
Line regulation	Rated load	$\pm 0.5$		%
Load regulation	230VAC	$\pm 1.5$		%
Ripple & Noise	20MHz bandwidth, 12 VDC Output		120	mV p-p
	20MHz bandwidth, 15 VDC Output		120	mV p-p
	20MHz bandwidth, 24 VDC Output		150	mV p-p
	20MHz bandwidth, 48 VDC Output		240	mV p-p
Hold up time	230VAC	30		ms
Start up time			3	S
No load power consumption	230VAC, 12 / 15 VDC Output		0.3	W
	230VAC, 24 VDC Output		0.35	W
	230VAC, 48 VDC Output		0.4	W
Voltage adjustable range	50% load, 12 VDC Output	12.0 - 13.8		V
	50% load, 15 VDC Output	13.5 - 18.0		V
	50% load, 24 VDC Output	21.6 - 29.0		V
	50% load, 48 VDC Output	43.2 - 55.2		V

Isolation Specifications				
Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, Leakage current < 5mA	4000		VAC



General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Overvoltage category	OVC III			
Over Current protection	Self-recovery	110 - 200		% of Iout
Over voltage protection	12 VDC Output	≤ 20		VDC
	15 VDC Output	≤ 25		VDC
	24 VDC Output	≤ 35		VDC
	48 VDC Output	≤ 60		VDC
Short circuit protection	Hiccup, Continuous, Self-recovery			
Switching Frequency		65		KHz
Operating temperature		-40 to +70		°C
Storage temperature		-40 to +85		°C
Operating altitude			2000	m
Power derating	-40 °C to -30°C, 12 / 48 VDC Output	3.0		% / °C
	-40 °C to -30°C, 24 VDC Output	7.0		% / °C
	-40 °C to -30°C, 15 VDC Output	8.0		% / °C
	45 °C to 70 °C	2.0		% / °C
	85 to 115 VAC	0.67		% / VAC
Temperature coefficient		± 0.03		% / °C
Protection Class	Class II			
Cooling	Free air convection			
Storage Humidity			95	% RH
Case material	Heat resistant black Plastic (flammability to UL 94V-0)			
Weight		235		g
Dimensions (L x W x H)	3.45 x 2.76 x 2.28 inches (92.66 x 70.00 x 58.00 mm)			
MTBF	> 300 000 hrs (MIL-HDBK -217F, t=+25°C)			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				

Safety Specifications				
Parameters				
Agency approvals	UL 62368-1			
Standards	Designed to meet IEC/EN 62368-1, EN61558-1, BS EN62368-1, IS13252 Part 1			
	EMC - Conducted and radiated emission	CISPR32 / EN55032, Class B		
	Electrostatic Discharge Immunity	IEC 61000-4-2 Contact ±6KV, Air ±8KV, Criteria A		
	RF, Electromagnetic Field Immunity	IEC 61000-4-3 10V/m, Criteria A		
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 ±4KV, Criteria A		
	Surge Immunity	IEC 61000-4-5 L-L ±2KV, Criteria A		
	CS, Conducted Disturbance Immunity	IEC 61000-4-6 10V r.m.s, Criteria A		
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11 0%, 70%, Criteria A		

## Derating

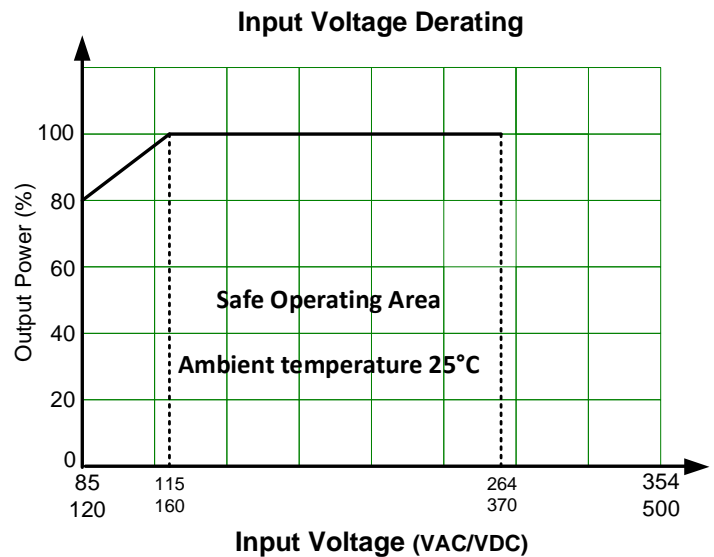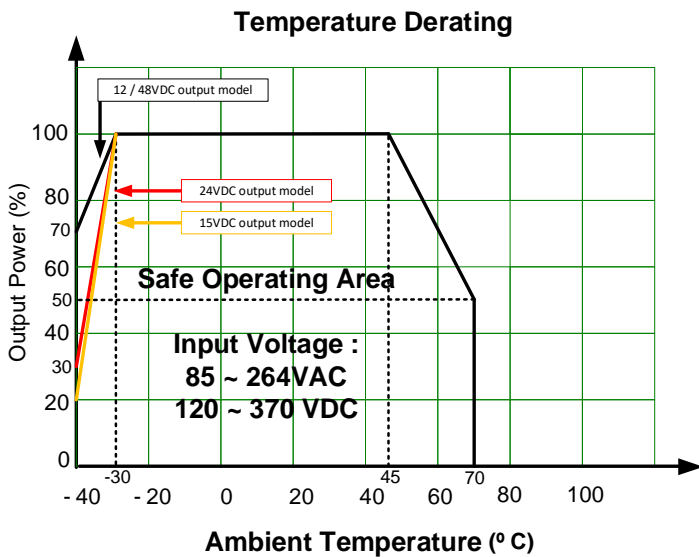

## Dimensions

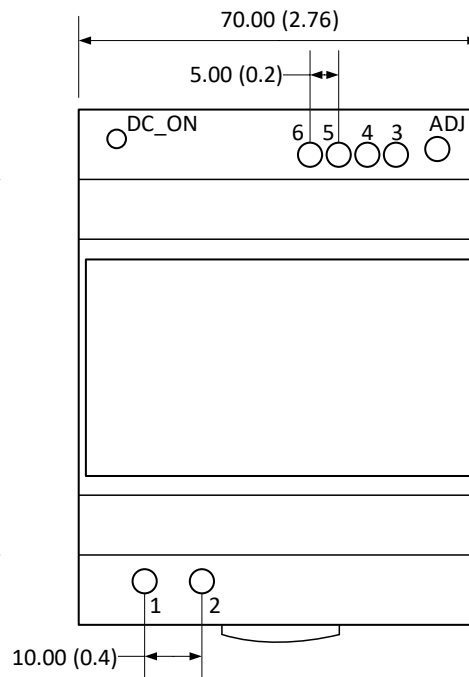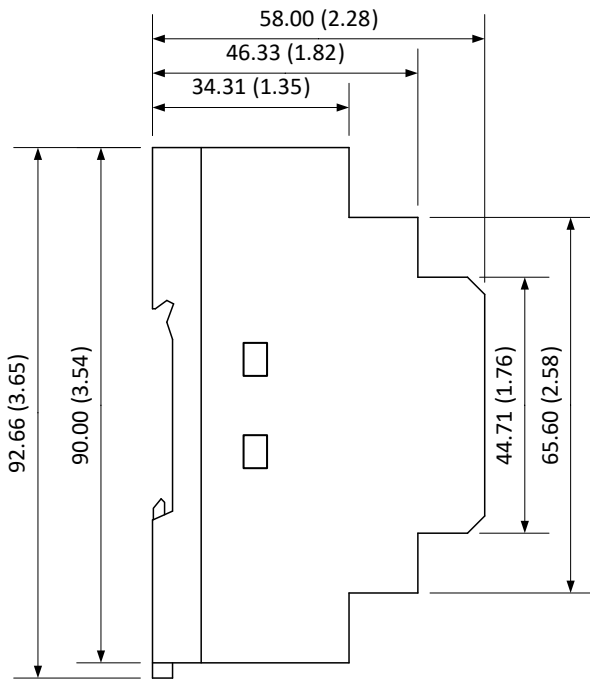

Pin Output Specifications	
Pin	Function
1	Input (L)
2	Input (N)
3	+V Output
4	+V Output
5	-V Output
6	-V Output
ADJ	Voltage adjustment

Note:  
Unit: mm (inch)  
General tolerance:  $\pm 1.0$  (0.04)  
Wire gauge: 24 - 12AWG  
Tightening torque: 0.4N·m Max.  
Mounting rail: TS35

**NOTE: 1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).