

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

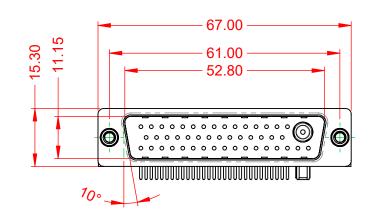




.X ±0.25 .XX ±0.13 .XXX ±0.05

## NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

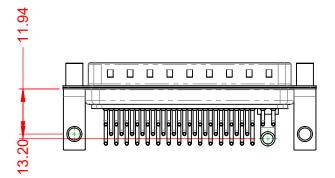

OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

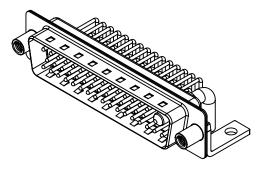

			SW REFERENCE NO.: 629 C	OMBO ASSEMBLY	
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-47W	1640-5NA	ISSUE
YOUR CONNECTION TO	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-47W	1640-5NA	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. 1000V AC rms

