

**TOLERANCE** UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

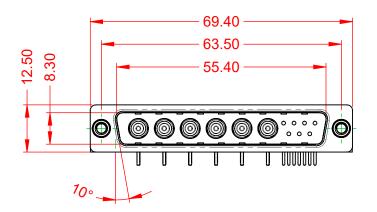



NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:** 

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

**OPERATING TEMPERATURE:** -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT

SIGNAL CONTACT RESISTANCE: 10mΩ MAX.

**INSULATOR RESISTANCE:** 5000MΩ min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

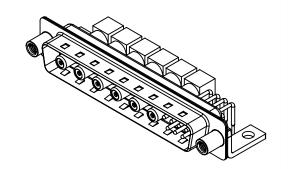

- 10.67	

## **COMBINATION D-SUB**



**EDAC INC** TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 C	OMBO ASSEMBLY	
	DRAWN: C.B	DATE: JAN. 01/2019	
	CHECKED:	DATE:	
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2	
ĺ	DRAWING NUMBER: 629-13W6240-5N6		

PART NUMBER: 629-13W6240-5N6

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ORIGINAL (1)

2W2





5W1

0000°








11W1


000000

5W5






13W3










17W5










21W4










## **COMBINATION D-SUB**



WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	DRAWN: C.B	DATE: JAN. 01/2019	
	CHECKED:	DATE:	
	SCALE: N.T.S	SHEET 2 OF 2	
•	DRAWING NUMBER: 629-13W	6240-5N6 ISSUE	

629-13W6240-5N6

PART NUMBER:



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE