

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

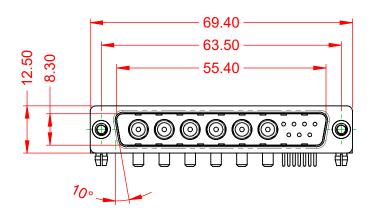



NOTES:

MATERIAL:

THERMOPLASTIC POLYESTER, UL94V-0 **HOUSING:**

SHELL: STEEL, NICKEL PLATED

CONTACT: COPPER ALLOY, 30µ" GOLD PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 20A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



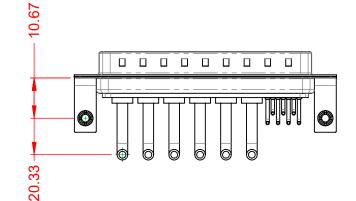

COMBINATION D-SUB

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	DRAWN: C.B	DATE: JAN. 01/20	19		
	CHECKED:	DATE:			
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
ĺ	DRAWING NUMBER: 620-13W6650-2N3		ISSLIE		

DRAWING NUMBER: 629-13W6650-2N3 ISSUE PART NUMBER: 629-13W6650-2N3



TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ORIGINAL (1)

 \circ





2W2

2WK2

5W1











11W1







13W3










17W5





13W6






21W4









COMBINATION D-SUB



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC.,AND
SHALL NOT BE REPRODUCED,OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C.B		DATE:	JAN.	01/20	19
CHECKED:		DATE:			
SCALE: N.T.S		SHEET	2	OF	2
DRAWING NUMBER:	629-13W6650-2N3			ISSUE	
PART NUMBER:	629-13W6650-2N3		1		

629 COMBO ASSEMBLY

SW REFERENCE NO .:

