


ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	2077820004	4ckt Receptacle assembly for Squba 3.6	2	PC
C	2077770001	Squba 3.6 female terminal 16 AWG	8	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B4	1X16AWG DISC MPPE BK UL11028 HOOKUP	BLACK
A2	B3	1X16AWG DISC MPPE BK UL11028 HOOKUP	BLACK
A3	B2	1X16AWG DISC MPPE BK UL11028 HOOKUP	BLACK
A4	B1	1X16AWG DISC MPPE BK UL11028 HOOKUP	BLACK

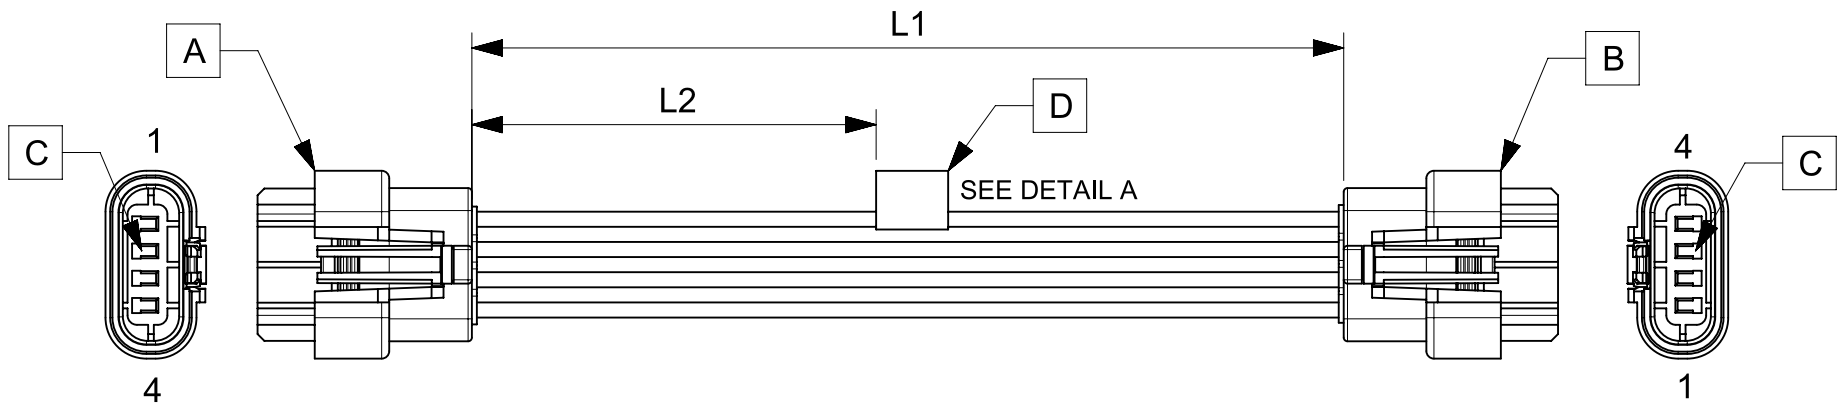

PART NUMBER	L1	L2	TITLE
2166201041	150±8	63 REF	SQUBA3.6 R-R 4CKT 150MM Sn
2166201042	300±10	138 REF	SQUBA3.6 R-R 4CKT 300MM Sn
2166201043	600±10	288 REF	SQUBA3.6 R-R 4CKT 600MM Sn

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Leak test must be ensured for sealed connector.
3. Connector view shown is from mating side.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/06/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 641049		
	mm	NTS	DRWN: ARAJU 2020/06/23		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/07/08		
ANGULAR TOL ± °		APPR: RDESAI01 2020/07/08		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	
3 PLACES ±		DRWN: ARAJU 2020/06/23		2166201041	
2 PLACES ±		APPR: RDESAI01 2020/07/08		DOC TYPE DOC PART REVISION	
1 PLACE ±		MATERIAL NUMBER		PSD 000 A	
0 PLACES ±		CUSTOMER		GENERAL MARKET	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	SHEET NUMBER
			A4-SIZE	216620	1 OF 1